MICROCOPY RESOLUTION TEST CHART

NATIONAL BUREAU OF STANDARDS 1963 A
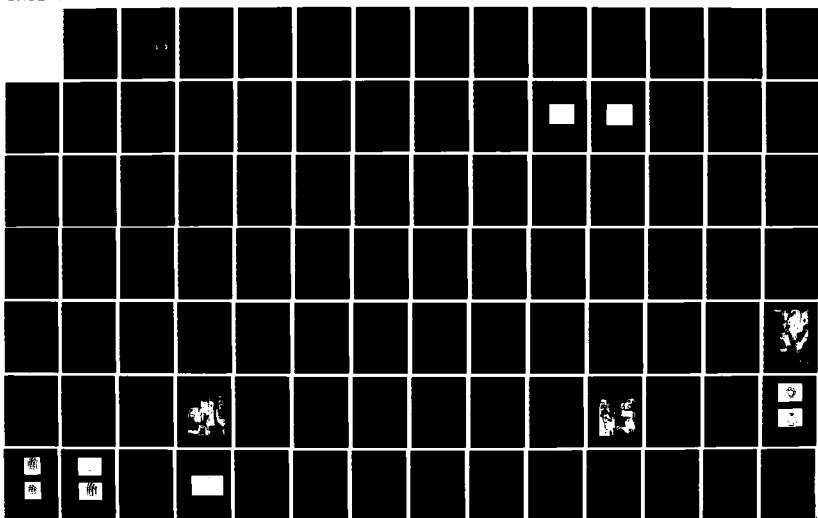
INTERFEROMETRIC MEASUREMENTS OF ANOMALOUS

DISPERSION IN HYDROGEN FLUORIDE

BY

JOHN MICHAEL RABINS

B.S., United States Air Force Academy, 1973

M.S., Air Force Institute of Technology, 1978

DISSERTATION

Submitted in Partial Fulfillment of the
Requirements for the Degree of

Doctor of Philosophy in Physics

The University of New Mexico
Albuquerque, New Mexico

May, 1985

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM

1. REPORT NUMBER	2 GOVT ACCESSION NO	3. RECIPIENT'S CATALOG NUMBER
AFIT/CI/NR 85-3D	AD-A156937	

4. TITLE (and Subtitle)	5 TYPE OF REPORT & PERIOD COVERED
Interferometric Measurements Of Anomalous Dispersion In Hydrogen Fluoride	THESIS/DISSERTATION
	6 PERFORMING ORG. REPORT NUMBER

7. AUTHOR(s)	8. CONTRACT OR GRANT NUMBER(s)
John Michael Rabins	

9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
AFIT STUDENT AT: The University of New Mexico	

11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE
AFIT/NR	May 1985
WPAFB OH 45433	13. NUMBER OF PAGES
	118

14. MONITORING AGENCY NAME & ADDRESS(If different from Controlling Office)	15. SECURITY CLASS. (of this report)
	UNCLASS
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

LYNN E. WOLAVER
Dean for Research and
   Professional Development
AFIT, Wright-Patterson AFB OH

14 May 85

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

ATTACHED

INTERFEROMETRIC MEASUREMENTS OF ANOMALOUS
DISPERSION IN HYDROGEN FLUORIDE

JOHN MICHAEL RABINS

B.S., Physics, United States Air Force Academy, 1973
M.S., Engineering Physics, Air Force Institute of Technology, 1978
Ph.D., Physics, University of New Mexico, 1985

Quantitative measurements of unsaturated anomalous dispersion of the $P_1(4)$ and $P_1(6)$ vibration-rotation transitions of hydrogen fluoride (HF) in absorption are reported. Contained also are measurements of the partially-saturated $P_1(4)$ transition. All measurements were obtained with an interferometric approach at pressures less than ten torr. A Fabry-Perot interferometer was used to spatially resolve the axial modes of an HF probe laser. A Michelson interferometer, one leg of which contained an HF absorption cell, imposed lines of constant phase. Fringe shifts were recorded and used to determine the refractive index change between axial mode frequencies. The unsaturated results compare favorably with computer-generated theoretical curves which account for proper amounts of pressure and Doppler broadening. A simple rate-equation model for the saturated results is proposed as an initial step in understanding the complex pressure-dependent relaxation processes occuring in this particular gas. The experimental results indicate a combined state-altering and velocity-changing collision rate of 10^6/sec-torr, a value lying between the total line-broadening rate and the gas kinetic (hard sphere) rate.

INTERFEROMETRIC MEASUREMENTS OF ANOMALOUS

DISPERSION IN HYDROGEN FLUORIDE

BY

JOHN MICHAEL RABINS

MAJOR, USAF

1985

118 PAGES

Ph.D.

UNIVERSITY OF NEW MEXICO

John Michael Rabins

Candidate

Physics and Astronomy

Department

This dissertation is approved, and it is acceptable in quality
and form for publication on microfilm:

Approved by the Dissertation Committee:

John C. Bellum   . Chairperson

_____

James J. Small

_____

Michael Jerlik

_____

_____

_____

Accepted:

_____

Dean, Graduate School

_____

Date

To the Lord

He reminds me often of the truth of Ecclesiastes 3:11, the

foolishness of man's wisdom, and His incredible love for us, anyway.

ACKNOWLEDGMENTS

INTERFEROMETRIC MEASUREMENTS OF ANOMALOUS

DISPERSION IN HYDROGEN FLUORIDE

BY

JOHN MICHAEL RABINS

ABSTRACT OF DISSERTATION

Submitted in Partial Fulfillment of the
Requirements for the Degree of

Doctor of Philosophy in Physics

The University of New Mexico
Albuquerque, New Mexico

May, 1985

INTERFEROMETRIC MEASUREMENTS OF ANOMALOUS DISPERSION IN HYDROGEN FLUORIDE

JOHN MICHAEL RABINS

B.S., Physics, United States Air Force Academy, 1973
M.S., Engineering Physics, Air Force Institute of Technology, 1978
Ph.D., Physics, University of New Mexico, 1985

Quantitative measurements of unsaturated anomalous dispersion of the $P_1(4)$ and $P_1(6)$ vibration-rotation transitions of hydrogen fluoride (HF) in absorption are reported. Contained also are measurements of the partially-saturated $P_1(4)$ transition. All measurements were obtained with an interferometric approach at pressures less than ten torr. A Fabry-Perot interferometer was used to spatially resolve the axial modes of an HF probe laser. A Michelson interferometer, one leg of which contained an HF absorption cell, imposed lines of constant phase. Fringe shifts were recorded and used to determine the refractive index change between axial mode frequencies. The unsaturated results compare favorably with computer-generated theoretical curves which account for proper amounts of pressure and Doppler broadening. A simple rate-equation model for the saturated results is proposed as an initial step in understanding the complex pressure-dependent relaxation processes occuring in this particular gas. The experimental results indicate a combined state-altering and velocity-changing collision rate of 11×10^6/sec-torr, a value lying between the total line-broadening rate and the gas kinetic (hard sphere) rate.

TABLE OF CONTENTS

TABLE OF CONTENTS--<u>Continued</u>.

LIST OF ILLUSTRATIONS

Figure 5. An Absorption Line

Figure 4. Intensity Profile

CHAPTER 2

THEORETICAL CONSIDERATIONS

The Concept of Absorption

An absorption line at frequency ν_0 exists when a curve such as
that pictured in Fig. 4 results from an actual absorption measurement,
which is made by recording the intensity of light transmitted through a
known thickness x of material while monitoring the frequency of the
incident light (whose intensity remains constant). The absorption
coefficient k_ν is then defined by

$$I_\nu = I_0 e^{-k_\nu x},$$
(2.1)

where I_ν and I_0 are respectively the transmitted and incident
intensities. Typically k_ν is measured in cm^{-1} while x is measured in
cm. From Eq. (2.1) we may obtain k_ν, which graphs like the curve shown
in Fig. 5. The quantity $\Delta\nu$ (typically called the halfwidth or
linewidth) represents the width of the curve at its half peak value.
Generally the absorption coefficient is represented as a function of
k_{max} and $\Delta\nu$, and depends primarily on the nature of the gas molecules,
their motion, and their mutual interaction (Mitchell and Zemansky,
1971).

The Einstein Theory of Radiation

We first picture a box containing two-level molecules and
isotropic radiation (of intensity I_ν and frequency in the range ν to

Figure 3. Superimposed Fabry-Perot and Michelson Interference Patterns

Figure 2. Spatially Resolved Axial Modes

headaches connected with random noise. Thus, ideally, at any instant of time, the only variable experienced by any frequency data point (in this case an axial mode) is the difference in refractive index. Also, the number of points on the dispersion curve that can be sampled at any instant is limited only by the number of axial modes generated by the probe laser.

Initially we tried to see anomalous dispersion in neon on the visible transition. The Fabry-Perot pattern (Fig. 2) showed about five axial modes from a Spectra Physics Model 124 laser. The Michelson interferometer imposed lines of constant phase, as seen in Fig. 3. Since neon lases between two excited states, we used a capacitative discharge to populate the lower lasing level. The discharge generated observable absorption for a time on the order of a millisecond, but also, unfortunately, caused two problems beyond our ability to solve easily. First, it created uneven spatial heating of the gas, causing beam steering. Second, the noise of the discharge light completely masked the crossed-interference pattern from view.

We thus abandoned neon and proceeded with HF, a gas with lasing transitions to the ground vibrational state. While we had a different set of problems to contend with (see Chaps. 4 and 6), we nevertheless showed the technique to work in absorption, even under saturation. There is no reason that it cannot be used successfully for a saturated gain medium as well. In principle, this technique offers perhaps the only available method for viewing the time-evolution of the refractive index in a pulsed laser.

report that, "it proved impossible to extract meaningful dispersion profiles as a function of frequency from the relatively high noise produced by the amplifier medium (Gross and Coffer, 1983)."

Drummond (1982) measured the refractive index of HF with a similar arrangement. Using an incandescent light, a quarter-meter monochromator, and a Mach-Zehnder interferometer (one leg of which contained a gas cell), he measured the fringe shifts due to changes in gas pressure. He was thus able to construct some of the most accurate experimental dispersion profiles available for HF between 2.5 μm and 2.9 μm. The resolution was not fine enough, though, to give meaningful data over the linewidth of an absorption line.

Of course, the linewidth of a transition is precisely where the axial laser modes fall. This paper describes a new technique in which saturated anomalous dispersion in absorption has been measured. It has the potential of measuring saturated anomalous dispersion in a gain medium as well. While somewhat similar to the Aerospace technique described above (we use a Michelson interferometer instead of a Mach-Zehnder), it differs in two significant regards. First, the HF laser cavity is made long enough to allow more than one axial mode to oscillate, thereby eliminating the need to scan through the gain. Second, these axial modes are separated spatially by a Fabry-Perot interferometer, enabling us to view them all at one instant of time. Therein lies an obvious advantage over the other techniques used to date. Whereas they all have employed a time-resolution format, we do not. By resolving spatially, this technique eliminates some of the

able to determine experimentally the anomalous dispersion profile in order to provide answers for some of the far-reaching questions.

There have been a number of successful attempts to see anomalous dispersion experimentally. Since the variation of refractive index can be calculated from the gain profile, measuring the gain profile with a probe laser provides an indirect measurement. Direct measurements have been made by:

1. Observing the mode-pulling effect and beat signal between two axial modes (Chodzko, Chang, and Mirels, 1978; Wang, 1976; Wang and Varwig, 1979a,b).

2. Measuring the beam steering that results from anomalous dispersion with a sensitive wavefront sensor, a Brewster's angle absorption cell, and a frequency-stable, frequency-scannable HF chemical laser (Wang and Varwig, 1981).

3. Interferometric techniques which are described below.

A group at Aerospace Corporation (Gross, et al., 1979) has measured anomalous dispersion in absorption with a Mach-Zehnder interferometer illuminated by a single-line, single-mode, frequency-scanned CW HF probe laser. The absorbing gas, contained in an absorption cell, was placed in one arm of the interferometer. As the probe laser was scanned in frequency across the transition, the interferometric fringes shifted their positions in proportion to the change in the refractive index. The anomalous dispersion could then be determined. Their ultimate goal of measuring anomalous dispersion in a saturated gain medium could not be met with this technique, however. In fact, they

Complicating matters is the fact that a medium subjected to a high-intensity laser beam will saturate in a manner dependent on many factors. These include the intensity and frequency of the saturating beam as well as the various collision and relaxation processes within the medium. For a predominantly Doppler-broadened medium, the laser beam will burn a hole into the gain profile at its own frequency but will leave the refractive index value there essentially unaltered. If there are many axial modes, as is true for the long cavities of high-power HF chemical lasers, the complex interaction of the modes with the gain will naturally affect the entire curve, and the entire gain curve can be depressed by saturation fairly uniformly, or homogeneously, even when pressure broadening is not significant. This kind of gain reduction implies a flattening of the refractive index curve, and we can thus see how, in a well-saturated HF laser, phase distortions might be unimportant (Gross, et al., 1979).

The general theory of saturated anomalous dispersion has been addressed by a number of authors (including Bennett, Jr., 1962a,b; Siegman, 1971). Booth and Troup (1969) have presented a nice treatment of the wavefront distortion caused by non-uniform saturated anomalous dispersion in laser amplifiers. They looked at a homogeneously broadened transition with a Lorentz line shape. Little theory exists, however, for the complex saturation processes in a continuous-wave (CW) chemical laser (Mirels, 1979, offers one such theory for an HF laser). It is even more difficult to get a theoretical grasp of the changing anomalous dispersion in a pulsed laser. Thus, it is important to be

Figure 1. Typical Anomalous Dispersion Curve for Gain Medium

CHAPTER 1

INTRODUCTION

The refractive index of the gain medium is an important

consideration in designing a gas laser with good beam quality. Temporal

and spatial inhomogeneities of the medium can affect the wave fronts

and, if serious enough, destroy the coherence of the beam. Even with

perfect temporal and spatial uniformity, however, there exists around a

lasing line an anomalous dispersion that places an ultimate limit on

beam quality.

Figure 1 shows a typical anomalous dispersion profile for an

unsaturated gain medium. As can be seen, the refractive index falls

precipitously through the emission line. If we neglect saturation

effects, this variation in index is large enough in a typical laser to

destroy the coherence between axial modes of a single transition in just

one round trip through the cavity. As an example, let us take a

hydrogen fluoride (HF) laser of wavelength 2.7 μm, with a 10 cm gain-

medium length (ℓ), and with two axial modes which "see" a difference in

refractive index (Δn) of 10^{-5}. Then, the phase change between the two

modes in one round trip is

$$\Delta \varphi = \frac{2\pi}{\lambda} (2\ell)\Delta n \cong 1.5\pi ,$$

(1.1)

or three-quarters of a wave.

1

LIST OF TABLES

LIST OF ILLUSTRATIONS--Continued.

LIST OF ILLUSTRATIONS--Continued.

$\nu + d\nu$) which is capable of causing molecular transitions between the ground state 1 and the excited state 2. We can then define the Einstein A and B coefficients as follows:

$B_{12}I_\nu$ is the probability per second that a molecule in state 1, exposed to isotropic radiation of intensity I_ν and frequency in the range ν to $\nu + d\nu$, will absorb a photon of energy $h\nu$ and make a transition to state 2.

A_{21} is the probability per second that an excited molecule will spontaneously emit (in any direction) a photon of energy $h\nu$ and make a transition to the ground state.

$B_{21}I_\nu$ is the probability per second that an excited molecule will undergo transition to state 1 when exposed to isotropic radiation of intensity I_ν and frequency between ν and $\nu + d\nu$, thereby emitting a photon of energy $h\nu$ in the same direction as the incoming photon.

By considering a state of thermodynamic equilibrium, Einstein derived the functional relationships

$$\frac{A_{21}}{B_{12}} = \frac{2h\nu^3}{c^2} \frac{g_1}{g_2} , \tag{2.2}$$

$$\frac{B_{21}}{B_{12}} = \frac{g_1}{g_2} , \tag{2.3}$$

where g_1 and g_2 are the statistical weights (degeneracies) of the two states. Also,

$$A_{21} = \frac{1}{\tau} \quad , \tag{2.4}$$

where τ is a measure of the lifetime of the atom in the excited state.

It should be noted that this section parallels the treatment given by Mitchell and Zemansky (1971). Hence, the B coefficients are defined in terms of intensity, as compared with the original B coefficients which were defined in terms of energy density. The relation between the two is

$$B(\text{density}) = \frac{c}{4\pi} B(\text{intensity}) \quad . \tag{2.5}$$

Now we consider a parallel beam of light of intensity I_ν and frequency in the range ν to $\nu + d\nu$ traversing a layer of molecules bounded by x and $x + dx$. Suppose there are N molecules/cm^3 in level 1, of which δN_ν are capable of absorbing light in the frequency range ν to $\nu + d\nu$, and N' molecules/cm^3 in level 2, of which $\delta N'_\nu$ are capable of emitting light in this range. Then the decrease in beam energy is

$$-d[I_\nu \delta\nu] = \delta N_\nu dx \ h\nu B_{12} \frac{I_\nu}{4\pi} - \delta N' dx \ h\nu B_{21} \frac{I_\nu}{4\pi} \quad , \tag{2.6}$$

where we have ignored the comparatively small contribution offered by the noncoherent spontaneous emission (Lengyel, 1971). If we rewrite the last equation as

$$-\frac{1}{I_\nu}\frac{dI_\nu}{dx}\,\delta\nu = \frac{h\nu}{4\pi}\,(B_{12}\delta N_\nu - B_{21}\delta N_\nu') \ , \tag{2.7}$$

we see immediately that the left-hand side is simply $k_\nu\delta\nu$ as defined by Eq. (2.1). Integrating over all frequencies, while treating ν as constant over the region of significant absorption, yields

$$\int_0^\infty k_\nu d\nu = \frac{h\nu_0}{4\pi}\,(B_{12}N - B_{21}N') \ , \tag{2.8}$$

where ν_0 is the center-line frequency. Finally, using the Einstein relations, Eqs. (2.2), (2.3), and (2.4), gives

$$\int_0^\infty k_\nu d\nu = \frac{\lambda_0^2 g_2}{8\pi g_1}\,NA\left(1 - \frac{g_1}{g_2}\frac{N'}{N}\right) \ , \tag{2.9}$$

where we have replaced A_{21} by A. For gases in which the upper-level population is small compared with the lower, i.e., $N'/N \ll 1$, we may write Eq. (2.9) as

$$\int_0^\infty k_\nu d\nu = \frac{\lambda_0^2 g_2}{8\pi g_1}\,NA \ . \tag{2.10}$$

This very important equation tells us that, regardless of the processes contributing to the formation of an absorption line, the total integrated absorption remains constant for a fixed number density N.

The Classical Electron Oscillator

We take a simple gas model in which there is negligible interaction between molecules and assume a driving electromagnetic field induces a dipole moment in each gas molecule by virtue of electron displacement, but leaves the nuclear position essentially unaffected. Thus, each molecule can be thought of as an electron on a spring with an equation of motion (in one dimension)

$$\ddot{x} + \gamma \dot{x} + \omega_0^2 x = -\frac{e}{m} E_0 e^{-i\omega t} , \qquad (2.11)$$

where ω_0 represents the natural resonance frequency and the damping term $\gamma \dot{x}$ arises because of radiation damping. γ represents the natural radiative damping rate and is proportional to the inverse of the excited state's lifetime. For justification of the simple form of the damping term, the reader is referred to the treatment given by Jackson (1975) or Marion (1965).

The solution to Eq. (2.11) is

$$x = \frac{(-e/m)E_0}{(\omega_0^2 - \omega^2) - i\gamma\omega} e^{-i\omega t} , \qquad (2.12)$$

and so the dipole moment resulting from the displacement of each electron is

$$p = -ex = \frac{(e^2/m)}{(\omega_0^2 - \omega^2) - i\gamma\omega} E_0 e^{-i\omega t} . \qquad (2.13)$$

If N represents the molecular number density, then the total dipole moment per unit volume (polarization) is simply

$$P = Np = \frac{N(e^2/m)}{(\omega_0^2 - \omega^2) - i\gamma\omega} E_0 e^{-i\omega t} \quad . \tag{2.14}$$

But

$$P = \hat{\chi}_e E, \tag{2.15}$$

where $\hat{\chi}_e$ is the complex electric susceptibility, and the dielectric constant is

$$\hat{\epsilon} = 1 + 4\pi\hat{\chi}_e. \tag{2.16}$$

Thus

$$\hat{\epsilon} = 1 + 4\pi \frac{N(e^2/m)}{(\omega_0^2 - \omega^2) - i\gamma\omega} \quad . \tag{2.17}$$

Since the dielectric constant for a gas is close to one, we may write

$$\sqrt{\hat{\epsilon}} \cong 1 + 2\pi \frac{N(e^2/m)}{(\omega_0^2 - \omega^2) - i\gamma\omega} \quad . \tag{2.18}$$

This equation may be separated into real and imaginary parts, yielding

$$\sqrt{\hat{\epsilon}} \cong 1 + 2\pi \frac{(\omega_0^2 - \omega^2)N(e^2/m)}{(\omega_0^2 - \omega^2)^2 + \gamma^2\omega^2} + i2\pi \frac{N\gamma\omega(e^2/m)}{(\omega_0^2 - \omega^2)^2 + \gamma^2\omega^2} \quad . \tag{2.19}$$

The Absorption Coefficient

The absorption coefficient k_ν is proportional to the imaginary part of Eq. (2.19), and since

$$\omega_0^2 - \omega^2 = (\omega_0 + \omega)(\omega_0 - \omega) \cong 2\omega(\omega_0 - \omega) , \qquad (2.20)$$

we can write

$$k_\nu \propto \frac{\gamma\omega}{[2\omega(\omega_0 - \omega)]^2 + \gamma^2\omega^2} = \left(\frac{1}{\gamma\omega}\right)\frac{1}{1 + [2(\omega - \omega_0)/\gamma]^2} . \qquad (2.21)$$

With the exception of the difference term, we may treat ω as constant throughout the absorption line. Hence,

$$k_\nu \propto \frac{1}{1 + [2(\omega - \omega_0)/\gamma]^2} = \frac{1}{1 + [2(\nu - \nu_0)/\Delta\nu_N]^2} , \qquad (2.22)$$

where the natural width $\Delta\nu_N$ is related to the Einstein A coefficient by

$$\Delta\nu_N = \frac{1}{2\pi\tau} = \frac{A}{2\pi} . \qquad (2.23)$$

Broadening Mechanisms and the Absorption Coefficient

So far we have been concerned only with natural broadening of the absorption line due to the finite radiative lifetime of the excited state. There are, however, other processes that contribute to the formation of the line, two of which are relevant to the problem at hand: Doppler broadening and pressure broadening. Doppler broadening arises from the random thermal motion of the gas molecules, which implies a

shift in the resonance frequency of each velocity group. Thus, the Doppler-broadened response is proportional to a Maxwellian (Gaussian) distribution, and if other broadening mechanisms are neglected, the absorption coefficient is given by the familiar expression

$$k_\nu = k_0 \, e^{-[2(\nu - \nu_0)\sqrt{\ln 2}/\Delta\nu_D]^2} \quad , \tag{2.24}$$

where $\Delta\nu_D$ is the Doppler linewidth, depending on the absolute temperature T and the molecular mass M according to

$$\Delta\nu_D = \frac{2\sqrt{2k\ln 2}}{c} \, \nu_0 \sqrt{\frac{T}{M}} \quad , \tag{2.25}$$

and k_ν represents the maximum absorption coefficient if only Doppler broadening exists. We can calculate k_0 by first integrating Eq. (2.24), getting

$$\int_0^\infty k_\nu \, d\nu = \frac{1}{2}\sqrt{\frac{\pi}{\ln 2}} \, k_0 \Delta\nu_D \quad . \tag{2.26}$$

But we know that

$$\int_0^\infty k_\nu \, d\nu = \frac{\lambda_0^2 g_2}{8\pi g_1} \, NA \quad . \tag{2.10}$$

So

$$k_0 = \frac{2}{\Delta\nu_D}\sqrt{\frac{\ln 2}{\pi}} \, \frac{\lambda_0^2 g_2}{8\pi g_1} \, NA \quad . \tag{2.27}$$

Pressure broadening of the absorption line stems from random collisions of radiating molecules which interrupt (or dephase) the resonant response. Lorentz treated the effect of collisions on the absorbing and emitting characteristics of the classical electron oscillator in a manner similar to that of radiation damping (Lorentz, 1915). He found the expression for the absorption coefficient of a gas with pure pressure broadening to be of the same form as Eq. (2.22), namely

$$k_\nu \propto \frac{1}{1 + [2(\nu - \nu_0)/\Delta\nu_p]^2} \quad ,$$

(2.28)

where $\Delta\nu_p$ is the pressure-broadened linewidth, given by

$$\Delta\nu_p = \frac{1}{\pi}\left(\begin{array}{c}\text{number of broadening collisions} \\ \text{per second per absorbing molecule}\end{array}\right) .$$

(2.29)

Pressure and lifetime broadening differ from Doppler broadening (and other inhomogeneous broadening mechanisms) in that each molecule contributes equally, or homogeneously, to the absorption curve. We may write the absorption coefficient for homogeneous broadening as

$$k_\nu \propto \frac{1}{1 + [2(\nu - \nu_0)/\Delta\nu_H]^2} \quad ,$$

(2.30)

where the contributing homogeneous linewidths are summed to give $\Delta\nu_H$.

The pressure-broadened linewidth of the fundamental transition $(v = 1, J') \leftrightarrow (v = 0, J'')$ is given by

$$\Delta \nu_p = \frac{N\overline{v}}{\pi c} \sum_J \rho_J \sigma_J \quad , \tag{2.31}$$

where N is the density of perturbing molecules at one atmosphere
pressure, $\overline{v}$ is the mean relative collision velocity, ρ_J is the popula-
tion distribution of a perturbing molecule's rotational states, and σ_J
is the collision cross section for each rotational state J of the per-
turbing molecule. The cross section σ_J is expressed in terms of the
development of the interaction in time, and contains the details of the
collision, such as the impact parameter and the interaction potential.
For a gas in rotational equilibrium, the population distribution is
given by

$$\rho_J = \frac{(2J + 1)e^{-E_J/kT}}{\sum_J (2J + 1)e^{-E_J/kT}} \quad . \tag{2.32}$$

Tsao and Curnette (1963) amplified upon a theory developed by
Anderson (1949) for calculating σ_J. This theory involved detailed
quantum-mechanical calculations of the probabilities of nonradiative
transitions caused by the combined effects of all intermolecular forces
in the system. There have been many calculations for the broadening of
HF which incorporate this theory (Benedict, et al., 1956a,b; Emanuel, et
al., 1971; Meredith, 1972; Meredith, 1973; Meredith and Smith, 1973).
These calculations differed in the form used for the interaction
potential and the collision trajectories. They nevertheless showed
generally good agreement with experimental results for cases in which

long-range dipole-dipole forces are dominant, such as for HF

self-broadening (Hough, 1977).

Since the three broadening mechanisms are independent of one

another, the combined absorption coefficient of a gas can be calculated

in one of two ways. First, we may consider every infinitesimal

frequency band of the homogeneously broadened curve to be Doppler

broadened. We do this by selecting some frequency band at a distance

$\nu - \nu_0$ from the center of a pure homogeneously-broadened line. Then we

represent the Doppler broadening of this band at a distance δ from

$\nu - \nu_0$ and integrate over δ. Another way of saying the same thing is

that we write the Lorentzian response of a single Doppler-shifted

molecule, multiply by the number of molecules having that particular

shift, and then sum over all possible shifts. The result is

$$k_\nu \propto \int_{-\infty}^{\infty} \frac{e^{-[2\delta\sqrt{\ln 2}/\Delta\nu_D]^2}}{1 + [2(\nu - \nu_0 - \delta)/\Delta\nu_H]^2} \, d\delta \ . \tag{2.33}$$

The second way of calculating the combined absorption

coefficient is to consider every infinitesimal frequency band of the

pure Doppler curve to be Lorentzian broadened, or

$$k_\nu \propto \int_{-\infty}^{\infty} \frac{e^{-[2(\nu - \nu_0 - \delta)\sqrt{\ln 2}/\Delta\nu_D]^2}}{1 + (2\delta/\Delta\nu_H)^2} \, d\delta \ . \tag{2.34}$$

The constant of proportionality is determined by Eqs. (2.10) and (2.26)

to be $2k_0/\pi\Delta\nu_H$ for either representation of the absorption coefficient.

Correcting the Population Density

We know from Eq. (2.27) that k_0 involves N, the number density of the lower level. We must now reckon with the fact that HF is a diatomic molecule whose energy structure includes a tightly spaced $[O(10 \text{ cm}^{-1})]$ rotational manifold within each vibrational level (see Fig. 6). So although essentially all of the total population is in the $v = 0$ vibrational level for a gas in thermal equilibrium at room temperature, the same cannot be said of the constituent rotational (J) levels. In fact, they are populated according to

$$N_J = \frac{N}{Q_r} (2J + 1) e^{-BJ(J + 1)hc/kT} \quad , \tag{2.35}$$

where N now represents the total number density, $(2J + 1)$ is the lower level degeneracy g_2, B is the rotational constant, and Q_r is the rotational state sum

$$Q_r = 1 + 3e^{-2Bhc/kT} + 5e^{-6Bhc/kT} + \ldots \ldots \tag{2.36}$$

Thus k_0 should be written

$$k_0 = \frac{2}{\Delta\nu_0} \sqrt{\frac{\ln 2}{\pi}} \frac{\lambda_0^2 g_2}{8\pi g_1} N_J A \tag{2.37}$$

$$= \frac{\sqrt{\ln 2}}{4\pi^{3/2}} \frac{\lambda_0^2 g_2 NA}{\Delta\nu_0 Q_r} e^{-BJ(J + 1)hc/kT} \quad .$$

6 _____

5 _____

4 _____

3 _____
2 _____
1 _____
J' = 0 _____

$v = 1$

$P_1(4)$ $P_1(6)$

6 _____

5 _____

4 _____

3 _____
2 _____
1 _____
J" = 0 _____

$v = 0$

NOT TO SCALE

$\Delta v = 0(3000 \ cm^{-1})$

Figure 6. Typical Rotational-Vibrational Spectrum For Diatomic Molecule

Figure 6. Typical Rotational-Vibrational Spectrum for Diatomic Molecule

Saturation and the Absorption Coefficient

The expression for the broadened absorption coefficient [Eq. (2.34)] contains k_0, the height of the pure Doppler curve at line center. Up to this point we have assumed negligible upper-level population, which is why k_0 contains the term N_J, the total lower-level population density. When the upper-level population cannot be ignored, however, as in the case of saturation, we must replace N_J by the more appropriate $N_L[1 - (g_L/g_U)(N_U/N_L)]$, where N_L and N_U are the respective population densities of the lower and upper states. To adequately model a system such as we have is an extremely complicated task, and beyond the scope of this investigation. The reason, of course, is the large number of cross-relaxational transitions that must be considered if accurate population densities are expected. What follows is a very simple model that serves as a logical beginning.

Consider a two-level system as shown in Fig. 7, where

N_L^0 = number density in lower state with no flux,

N_L = number density in lower state with flux,

N_U = number density in upper state,

σ_A = small-signal absorption cross section,

σ_{SE} = small-signal stimulated emission cross section $[(g_L/g_U)\sigma_A]$, and

K = state-altering and velocity-changing collision rate.

$$(2.38)$$

Figure 10.   Computer-Generated Absorption Profile

$$k = \frac{2k_0}{-\Delta v_H} \sum_{-3000}^{3000} \frac{e^{-[2X\sqrt{\ln 2}/\Delta v_D]^2}}{1 + [2(V-X)/\Delta v_H]^2} \Delta X \quad , \tag{3.5}$$

where $V \equiv v - v_0$ represented the frequency distance from line center, and X was a variable distance from v_0. We decided to use Eq. (2.34) instead of Eq. (2.33) for two reasons. First, it converged faster; about half the computer time was necessary. Second, saturation theory is more manageable when we build a Doppler curve with many Lorentzians, as opposed to the opposite case. We selected a step size ΔX of 5 MHz and a range of absorption values large enough to include over 98% of the theoretically predicted area under the curve. The range over which the sum was taken (3000 MHz on either side of line center) was made to match the range of absorption values.

A considerable body of experimental data exists regarding the widths of self-broadened lines in the $v(1 - 0)$ band of HF (Meredith, 1972). Hough (1977) presents a graphic summary of these measured linewidths, in addition to the closely-matching theoretical values (see Chap. 2). It was from these measured values that we selected Δv_H to be 36 MHz/torr for the $P_1(4)$ line and 14 MHz/torr for the $P_1(6)$ line.

Figure 10 is an example of an absorption profile generated with this program. Note that, even though only 400 MHz on each side of line center is displayed in the graph, a full 3000 MHz on each side was calculated and stored for later use in computing the index of refraction. We computed and stored absorption files for pressures ranging from .5 torr to 5 torr for the $P_1(4)$ line, and from .5 torr to 5 torr for the $P_1(6)$ line.

—

$$k_0 = 1.22 \times 10^{15} \frac{\lambda_0^2 pAg_2}{Q_r \Delta \nu_D} e^{-BJ(J+1)hc/kT} \quad . \tag{3.3}$$

We note that, at higher pressures (>10 torr), the presence of dimers would adversely affect the validity of the ideal gas law. For pressures below 5 torr, however, the dimer influence is small. Dividing by the pressure, we obtained the absorption per torr

$$k_0' = \frac{k_0}{P} = 1.22 \times 10^{15} \frac{\lambda_0^2 Ag_2}{Q_r \Delta \nu_D} e^{-BJ(J+1)hc/kT} \quad . \tag{3.4}$$

Table 1 contains the calculated k_0' values for both the $P_1(4)$ and $P_2(6)$ lines at $T = 297°K$, as well as values for the various components of Eq. (3.4). We used Herzberg's (1950) value for the rotational constant B and Emanuel's (1971) calculated A coefficients.

Table 1. Calculated k_0' Values

Line	λ_0 (μm)	$\Delta \nu_D$(MHz)	A(sec^{-1})	Q_r	B(cm^{-1})	k_0'(cm^{-1}-torr^{-1})
$P_1(4)$	2.64	313.58	116.00	10.20	20.94	2.83
$P_2(6)$	2.71	305.73	113.18	10.20	20.94	.50

Modeling the Unsaturated Absorption Coefficient

Now that we had found k_0, tailoring Eq. (3.1) to the computer was simply a matter of writing the integral as a truncated sum

CHAPTER 3

MODELING THE THEORY BY COMPUTER

We used a Hewlett Packard Series 200 (Model 16) Personal

Computer and Model 7470A Plotter to numerically integrate and plot the

theoretical expressions for the absorption coefficient

$$k_\nu = \frac{2k_0}{\pi \Delta \nu_H} \int_{-\infty}^{\infty} \frac{e^{-[2(\nu - \nu_0 - \delta)\sqrt{\ln 2}/\Delta \nu_D]^2}}{1 + (2\delta/\Delta \nu_H)^2} \, d\delta \qquad (3.1)$$

and the refractive index

$$n - 1 = \frac{\lambda_0}{4\pi} \int_0^{\infty} \frac{k_{\nu'} d\nu'}{\nu' - \nu} . \qquad (3.2)$$

Appendix A contains a listing of the computer programs.

Calculating k_0

Common to both expressions above (although buried in the second)

is k_0, the peak absorption if Doppler broadening alone is present. We

found this absorption coefficient by starting with

$$k_0 = \frac{\sqrt{\ln 2} \, \mu_0^2 g_u NA}{4\pi^{3/2} \Delta \nu_D Q_r} e^{-BJ(J + 1)hc/kT} , \qquad (2.37)$$

and then writing this in terms of pressure (at $T = 297°K$) by using the

ideal gas law, yielding

Figure 9. The Broadened Absorption Curve

$$n - 1 = \frac{\lambda_0}{4\pi} \int_0^\infty \frac{k_{\nu'} d\nu'}{\nu' - \nu} \ . \tag{2.59}$$

This expression can now be used to compute the broadened index curve.

The Effect of Broadening on the Refractive Index

Now we wish to account for the broadening of the absorption curve. To do so, we partition the absorption curve as shown in Fig. 9 and designate an A coefficient to each section according to

$$A_{\nu'} = A \frac{k_{\nu'} d\nu'}{\text{total area}} = A \frac{k_{\nu'} d\nu'}{\int_0^\infty k_\nu d\nu} \quad . \tag{2.56}$$

The index of refraction is constructed, then, by writing Eq. (2.55) as an integral over all ν'

$$n - 1 = \frac{N_J A}{32\pi^3 \int_0^\infty k_\nu d\nu} \frac{g_2}{g_1} \lambda_0^3 \int_0^\infty \frac{k_{\nu'} d\nu'}{\nu' - \nu} , \tag{2.57}$$

where we have removed the λ_0^3 term from the integral as essentially constant throughout the line. Using Eq. (2.26) for the area under the curve

$$\int_0^\infty k_\nu d\nu = \frac{1}{2} \sqrt{\frac{\pi}{\ln 2}} k_0 \Delta \nu_D , \tag{2.26}$$

we may write

$$n - 1 = \frac{N_J A \sqrt{\ln 2}}{16 \pi^{7/2} k_0 \Delta \nu_D} \frac{g_2}{g_1} \lambda_0^3 \int_0^\infty \frac{k_{\nu'} d\nu'}{\nu' - \nu} , \tag{2.58}$$

which simplifies to

$$n - 1 = \frac{e^2}{2\pi mc^2} \sum_{j=0}^{\infty} \sum_{k=0}^{\infty} \frac{\lambda^2 \lambda_{kj}^2}{\lambda^2 - \lambda_{kj}^2} N_j f_{kj} \left(1 - \frac{N_k}{N_j} \frac{g_j}{g_k} \right) , \qquad (2.53)$$

which was derived from Kramer's quantum-theoretical dispersion formula. Here, the sum is over all possible transitions $k \leftrightarrow j$, where k and j are the upper and lower states, respectively. g_k and g_j are the statistical weights and N_k and N_j are the number densities of the two states, while λ_{kj} is the wavelength emitted/absorbed by the transition. The oscillator strength f_{kj} can be thought of as a measure of the actual transitional response in relation to the response of a classical electron oscillator of the same frequency. It relates to the Einstein A coefficient by

$$f_{kj} = \frac{mc\lambda_{kj}^2}{8\pi^2 e^2} \frac{g_k}{g_j} A_{kj} . \qquad (2.54)$$

For wavelengths near an absorption line of a nonexcited gas at room temperature, we may ignore the contribution of all other absorption lines to the index and thus write

$$n - 1 = \frac{e^2 N_J f}{2\pi mc^2} \frac{\lambda^2 \lambda_0^2}{\lambda^2 - \lambda_0^2} , \qquad (2.55)$$

where unnecessary subscripts have been dropped and λ_0 is the wavelength of the transition. With the exception of the oscillator strength, Eq. (2.55) is identical to Eq. (2.52).

$$\sigma_A = \frac{\frac{1}{2}\sqrt{\frac{\pi}{\ln 2}}\,k_0 \Delta\nu_D}{N_L^0 d\nu}\,\frac{1}{1 + [2(\nu - \nu_s)/\Delta\nu_H]^2} \quad . \tag{2.49}$$

The population dN_U and dN_L at frequency ν may now be found using Eqs. (2.41) and (2.42), after which, the effective k_0 value at ν, $k_0(\text{eff})$, follows from Eq. (2.45). This value is then used in Eq. (2.34).

The Index of Refraction

The real part of Eq. (2.19) represents the refractive index

$$n \cong 1 + 2\pi\,\frac{(\omega_0^2 - \omega^2)N_J\,(e^2/m)}{(\omega_0^2 - \omega^2)^2 + \gamma^2\omega^2} \quad . \tag{2.50}$$

Typically, the damping term in the denominator is small and, in the near infrared, may be neglected for frequencies on the order of 10 MHz or more from line center. Thus,

$$n \cong 1 + 2\pi\,\frac{N_J\,(e^2/m)}{\omega_0^2 - \omega^2} \quad , \tag{2.51}$$

or, in terms of wavelength,

$$n \cong 1 + \frac{N_J e^2}{2\pi mc^2}\,\frac{\lambda^2 \lambda_0^2}{\lambda^2 - \lambda_0^2} \quad . \tag{2.52}$$

This expession bears a strong resemblance to Ladenbury's (1928)

We may thus think of each velocity group as having an effective k_0 depending on the degree its Lorentzian saturates

$$k_0(\text{eff}) = k_0 \frac{dN_L[1 - (g_1/g_2)(dN_U/dN_L)]}{dN_L^0} \quad , \tag{2.45}$$

where dN_L, dN_U, and dN_L^0 are differential population densities for the frequency band ν to $\nu + d\nu$. At frequency ν,

$$dN_L^0 = N_L^0 \frac{d\nu}{\int_0^\infty k_\nu \, d\nu} k_0 e^{-[2(\nu - \nu_0)\sqrt{\ln 2}/\Delta\nu_D]^2} \quad . \tag{2.46}$$

The small-signal absorption at ν_s offered by the Lorentzian centered at ν is just

$$\alpha = \frac{k_0 e^{-[2(\nu - \nu_0)\sqrt{\ln 2}/\Delta\nu_D]^2}}{1 + [2(\nu - \nu_s)/\Delta\nu_H]^2} \quad , \tag{2.47}$$

and the absorption cross section may be written

$$\sigma_A = \frac{\alpha}{dN_L^0} = \frac{\int_0^\infty k_\nu \, d\nu}{N_L^0 d\nu} \frac{1}{1 + [2(\nu - \nu_s)/\Delta\nu_H]^2} \quad , \tag{2.48}$$

or

Figure 8. Absorption Line Response to a Saturating Signal

    a. Without Saturating Signal
    b. With Saturating Signal

$$N_L = \frac{N_L^0 [\sigma_{SE}/\sigma_A + Kh\nu/\sigma_A I]}{1 + \sigma_{SE}/\sigma_A + Kh\nu/\sigma_A I} = N_L^0 - N_U \ . \tag{2.42}$$

These results make sense in the limits of very low intensity and very high intensity. For $\sigma_A I \ll Kh\nu$,

$$N_U \rightarrow \frac{N_L^0}{Kh\nu/\sigma_A I} = \frac{\sigma_A I}{Kh\nu} N_L^0 \ . \tag{2.43}$$

The upper-level density is directly proportional to the intensity and inversely proportional to the collisional rate K. For $\sigma_A I \gg Kh\nu$,

$$N_U \rightarrow \frac{N_L^0}{1 + \sigma_{SE}/\sigma_A} = \frac{1}{2} N_L^0 \tag{2.44}$$

if the levels have the same statistical weights.

Now consider Fig. 8a, in which we think of the broadened absorption line as being composed of many Lorentzian lines. Each Lorentzian may be thought to represent a particular velocity group (or population). A saturating signal at ν_s will interact strongly with those velocity groups having significant absorption at that frequency. Hence, for low pressures, at which the Lorentzian widths are small, each Lorentzian will depress according to the absorption it affords the saturating signal, and a hole will be burned in the overall response curve (Fig. 8b).

We represent the rate out of the lower state as $N_L \sigma_A I/h\nu$ for photon collisions and KN_L for molecular collisions, and the rate into the lower state as $N_U \sigma_{SE} I/h\nu$ for photon collisions and KN_L^0 for molecular collisions. We have assumed the lower-level activation rate to be unaffected by a small saturating signal, hence the N_L^0 term in the lower-level collision rate.

The rate into the upper state is $N_L \sigma_A I/h\nu$ for photon collisions and 0 for molecular collisions. Finally, the rate out of the upper state is written as $N_U \sigma_{SE} I/h\nu$ for photon collisions and KN_U for molecular collisions. Note that we assume the same collisional rate K for both levels.

In steady state, the rates into and out of the upper state are equal

$$N_L \sigma_A I/h\nu = N_U \sigma_{SE} I/h\nu + KN_U, \tag{2.39}$$

as are the rates into and out of the lower level

$$N_L \sigma_A I/h\nu + KN_L = N_U \sigma_{SE} I/h\nu + KN_L^0. \tag{2.40}$$

We may solve these two equations for N_U and N_L, yielding

$$N_U = \frac{N_L^0}{1 + \sigma_{SE}/\sigma_A + Kh\nu/\sigma_A I} \tag{2.41}$$

and

Figure 7. A Simple Saturation Model

Modeling the Saturated Absorption Coefficient

Equation (3.1) was used to model the saturated absorption line with one change: k_0 was replaced by a computed $k_0(\text{eff})$ for each frequency X. The step size ΔX again was 5 MHz. To compute $k_0(\text{eff})$ at a particular value of X we did the following (see Fig. 11):

1. First, we used Eq. (2.46) to determine the unsaturated population density corresponding to the velocity group centered at X

$$\Delta N_L^0 = N_L^0 \frac{k_0 e^{-[2X\sqrt{\ln 2}/\Delta \nu_D]^2}}{\frac{1}{2}\sqrt{\frac{\pi}{\ln 2}} k_0 \Delta \nu_D} \Delta X$$

$$= 5.63 \times 10^{13} p e^{-(.0055X)^2} , \tag{3.6}$$

where the appropriate parameters were substituted and the pressure p was measured in torr.

2. The small-signal absorption cross section (by that velocity group) for each mode was found according to

$$\sigma_{A1} = \frac{k_0 e^{-[2X\sqrt{\ln 2}/\Delta \nu_D]^2}}{1 + [2(X - S_1)/\Delta \nu_H]^2} \frac{1}{\Delta N_L^0} , \tag{3.7}$$

$$\sigma_{A2} = \frac{k_0 e^{-[2X\sqrt{\ln 2}/\Delta \nu_D]^2}}{1 + [2(X - S_2)/\Delta \nu_H]^2} \frac{1}{\Delta N_L^0} . \tag{3.8}$$

If each mode burned only one hole in the curve, then the total absorption cross section for the velocity group at X would be found by adding Eqs. (3.7) and (3.8)

Figure 11. Computer Model for Saturated Absorption Line

$$\sigma_A = \sigma_{A1} + \sigma_{A2} \quad . \tag{3.9}$$

Since we saturated the transition in a Michelson interferometer, however, each mode affected two velocity groups. Thus, we wrote

$$\sigma_A = 2(\sigma_{A1} + \sigma_{A2}) \quad , \tag{3.10}$$

where we neglected the small amount of absorption on the first pass through the gas cell.

    3. Then ΔN_U was determined from Eq. (2.41),

$$\Delta N_U = \frac{\Delta N_L^0}{1 + \sigma_{SE}/\sigma_A + Kh\nu/\sigma_A I} \quad , \tag{3.11}$$

where I represented the average intensity of the two modes. The modes were assumed to be of equal intensity.

    We used three different values for K, the combined state-altering and velocity-changing collision rate. The first corresponded to the total line broadening, which, for the $P_1(4)$ line, is

$$K = \pi \Delta \nu_H \cong 113 \times 10^6 / \text{sec-torr}. \tag{3.12}$$

We expected that this value might be high since it includes all phase-changing collisions. So we selected as our second value

$$K = \pi \Delta \nu_H / 10 \cong 11 \times 10^6 / \text{sec-torr}. \tag{3.13}$$

The third value for K was a gas kinetic (hard sphere) rate which was calculated as follows. The nuclear separation in the HF molecule was determined from the rotational constant to be .917 Å. This distance was added to the covalent radii of hydrogen (.32 Å) and fluorine (.72 Å) to give an approximate molecular diameter of 1.96 Å. This, then, yielded a cross section of

$$\sigma_0 = \pi d^2 = 1.2 \times 10^{-15} \text{ cm}^2. \tag{3.14}$$

For an average relative velocity between molecules

$$\bar{v} = 7.5 \times 10^4 \text{ cm/sec}, \tag{3.15}$$

and number density per torr

$$N/p = 3.25 \times 10^{16}/\text{cm}^3\text{-torr}, \tag{3.16}$$

we found the gas kinetic collision rate to be

$$K = \bar{v}\sigma_0 N/p \cong 3 \times 10^6/\text{sec-torr}. \tag{3.17}$$

4. Finally, k_0(eff) was found by using

$$k(\text{eff}) = k_0 \frac{\Delta N_L [1 - (g_l/g_u)(\Delta N_u/\Delta N_L)]}{\Delta N_L^0}. \tag{3.18}$$

Modeling the Index of Refraction

To determine the refractive index corresponding to a particular absorption profile, we rewrote the integral in Eq. (3.2) as a sum

$$n(V) - 1 = \frac{\lambda_0}{4\pi} \sum_{-3000}^{3000} \frac{k_\chi \Delta X}{X - V} \quad , \tag{3.19}$$

where V and X were defined as before. ΔX was set at 5 MHz.

For each pressure of interest, we computed two index of refraction curves. One was simply the curve obtained from an unsaturated Doppler-broadened line, where

$$k_\chi = k_0 e^{-[2X\sqrt{\ln 2}/\Delta v_D]^2} \quad . \tag{3.20}$$

The other was the curve derived from the files created with Eq. (3.12). A representative example of each is contained in Figs. 12 and 13. Figures 14-16 contain comparative absorption and dispersion profiles for the three different collision rates used in the saturation model.

The Index Difference Between Modes

The frequency difference between modes was determined to be 290 MHz, 190 MHz, and 160 MHz for the three different cavity lengths (see Chap. 5). So, to figure the difference in refractive index between two modes of equal intensity for the shortest cavity, for example, we simply doubled the index value at 145 MHz from line center. This was then plotted against pressure to give a curve such as that displayed in Fig. 17. The computed curves for the different transitions and cavity lengths are contained in Chap. 5 along with the experimental results.

$(n-1)\times 10^4$

1

Doppler Broadened Index
of Refraction for $P_1(4)$
at 2 Torr

-400 -300 -200 -100   100   200   300   400

-1

Frequency Difference From Line Center (MHz)

Figure 12. Computer-Generated Index of Refraction for Pure Doppler
Broadening

Figure 13. Computer-Generated Index of Refraction for Combined Broadening

Figure 14. Saturated Absorption and Index of Refraction Curves for 75 cm Cavity (K = $\pi\Delta\nu_{II}$ = 113x10$^{'}$/sec-torr)

Figure 15. Saturated Absorption and Index of Refraction Curves for 75 cm Cavity (K = $\Delta\nu_H$/10 = 11x10 /sec-torr)

Figure 16. Saturated Absorption and Index of Refraction Curves for 75 cm Cavity (K = Gas Kinetic = 3x10^f/sec-torr)

Figure 17. Theoretical Doppler and Combined Broadening Curves for 47.3 cm Cavity.

CHAPTER 4

EXPERIMENTAL APPARATUS

The Laser

A Helios CLIIIb HF/DF Chemical Laser was used for all of the experiments. This particular model is a probe laser capable of generating single-transition laser radiation by means of a Zero-Order Grating Coupler (Fig. 18). The coupler employs a 300 line/mm blazed grating that selects a line by returning the 1st order Littrow diffracted beam to the rear mirror of the laser cavity. The specular reflection of the grating is output-coupled by a copper mirror attached to the same mount as that holding the grating. The advantage of this arrangement is that, regardless of the transition selected, the output beam emerges in a constant direction.

The active medium was produced by the reactions

$$SF_6 + O_2 + He \rightarrow 6F + SO_2 + He \quad , \tag{4.1}$$

$$2F + H_2 \rightarrow 2HF^* \quad , \tag{4.2}$$

where HF^* denotes HF in an excited vibrational state. Helium, oxygen, and sulfur hexafluoride were first introduced to the discharge tube (see Fig. 19) where free fluorine was generated. The helium served as a buffer gas while the oxygen was used to scrub the sulfur. As can be

COPPER MIRROR

MIRROR MOUNT AXIS

CAVITY AXIS

ACTIVE MEDIUM

REAR
MIRROR

GRATING

50°

OUTPUT
BEAM

L

Figure 18.   Laser Cavity with Zero-Order Grating Coupler

52

Figure 13. The Laser

a.

b.

Figure 26. Axially-Symmetric View of Combined Interference Pattern

a. Empty Gas Cell
b. HF in Gas Cell

Typically we repeated runs with like conditions a number of times in order to provide many independent data points for analysis.

pattern (co-located at infinity) was focussed at the camera by mirror M1 (f = 1 m), which was situated one meter from the camera.

Fringe Visualization Technique

The optical path difference between the two legs of the Michelson interferometer was intentionally made to be close to zero to ensure that any measured fringe shift was due exclusively to anomalous dispersion. The Fabry-Perot was adjusted to give well-focussed rings and the Michelson mirrors were adjusted to give horizontal fringes, as seen in Fig. 26a.

We began each experimental run by evacuating the gas cell thoroughly by pumping on it for several hours. Fresh gas was then slowly admitted into the cell until a steady pressure was achieved by properly coordinating the needle valves. With the gas pressure steady, we would then push on the laser-cavity grating mount with our fingers in order to get two modes of fairly equal intensity oscillating. Our feedback mechanism was simply the television screen that continually monitored the camera signal. Figure 26b shows a good data point in which anomalous dispersion is clearly seen. Like Fig. 26, Fig. 27 gives a qualitative comparison between the zero-pressure and nonzero-pressure cases. The difference is that Fig. 27 is a view obtained by tilting the Fabry-Perot interferometer slightly off axis. Fig. 28 shows two modes of uneven intensity (an improper point). All data were recorded for later analysis. Once we were certain that we had seen two equal-intensity modes, we noted the location on the tape and went on to the next gas pressure.

Figure 25. Optical Diagnostics for Saturated Measurements

Figure 24. Optical Diagnostics Diagram for Saturated Measurements

with an MKS Instruments 170M-27E Digital Readout Unit and 170M-66

Baratron and Pressure Head.

The combined Fabry-Perot and Michelson interference patterns

were imaged by an I.S.I. Group Model 86 Thermal Imaging System Camera

Head and Remote Camera Control Unit. This type of camera is a pyro-

electric vidicon system that responds to time-changes in temperature on

the Triglycine Sulphate (TGS) target. Thus, a steady-state input must

be interrupted by panning the camera or chopping the beam. We decided

to chop the beam mechanically. Mirror M2 had a 40 cm focal length. We

viewed our data with an RCA TC1210 Video Monitor and recorded it with a

Sony VO-2610 Video Cassette Recorder/Player. A Datum 9310-100 Time Code

Generator/Translator was used to imprint a time code on the audio track

of the tape, thereby enabling us to accurately locate and review data.

Experimental Layout for Saturated Measurements

We were able to partially saturate the transition by changing

the order of the interferometers as shown in Fig. 24. Figure 25 is a

photograph of the same arrangement. Lens L1 (f = 1 m), which was

located 68.5 cm from the gas cell, reduced the beam diameter (at the

cell) to approximately a millimeter, a third of its original size. We

measured the intensity profile by removing one of the cell windows and

then sequentially measuring power through one of several different-

sized holes placed just behind the cell window (see Chap. 5). Lens

L2 (f = 15 cm) was placed one focal length from the Michelson back

mirrors so as to image the fringes at infinity. As can be seen in Fig.

24, the Fabry-Perot interferometer followed the Michelson. The combined

Figure 23. Gas Cell Construction

MIRROR

MICHELSON
INTERFEROMETER

PREDOMINANT
POLARIZATION

BREWSTER
WINDOWS

MIRROR

ACTIVE MEDIUM

BEAM
SPLITTER

Figure 22. Relative Orientation of Brewster Windows and Michelson
Beam Splitter

optical path difference (OPD) of the two legs was intentionally made to be small (see page 64). The Michelson thus served as a Fizeau interferometer in that the 100% mirrors formed a slight wedge. Accordingly, the lines of constant phase were localized at or near these mirrors (Born and Wolf, 1975). Mirror M1 (f = 1 m), then, which was placed one meter from the Michelson mirrors, focussed the Fabry-Perot pattern (originally at infinity) in the same image plane as the Michelson fringes.

The beam splitter was a CaF_2 flat specially coated on the front surface for 50% reflection at 45 degrees. The back surface had no coating (although an AR coating would have been desirable). Thus, the beam splitter was intentionally situated with the same relative orientation as the laser Brewster windows, as shown in Fig. 22. We did so in order to minimize reflection of the predominant polarization from the back surface of the beam splitter by taking advantage of the near-Brewster angle beam incidence. This simple precaution helped to eliminate unwanted interference patterns caused by an additional reflecting surface.

A schematic of the gas cell is contained in Fig. 23. It was constructed of aluminum and a pair of high optical-quality CaF flats. Because passivation with HF proved difficult, we opted for a flowing gas system instead of a static system. We achieved steady pressures as low as .075 torr by using a Welch Duo-Seal Model 1402 Vacuum Pump and the needle valve arrangement shown in Fig. 21. Pressures were monitored

Figure 21. Optical Diagnostics Diagram for Unsaturated Measurements

Figure 20. Optical Diagnostics for Unsaturated Measurements

The solution involved placing the laser upon an optical table suspended by four inflatable wheelbarrow innertubes. The table isolated the laser cavity from external vibrations, and mode control was attained by manually applying increasing pressure to the grating mount until two modes of fairly equal intensity appeared.

Experimental Layout for Unsaturated Measurements

We obtained all of the unsaturated data with the optical diagnostics equipment pictured in Fig. 20 and diagrammed in Fig. 21. The HF beam first went through a diverging lens and then through a Fabry-Perot interferometer with one-inch calcium fluoride (CaF_2) plates. These plates were 98% reflective on one side and anti-reflection (AR) coated on the other. The purpose of lens L1 (f = 3 cm) was to enable us to obtain the maximum resolution possible by completely filling the interferometer plates (see Chap. 6). The interferometer itself consisted of two mounts separated rigidly by a quartz tube. Each mount was machined of a single piece of steel using a design created by machinist Carl Pelander of the Joint Institute for Laboratory Astrophysics (JILA). Appendix B contains a close-up photograph and a copy of the blueprint used in the mount's construction. A distinct advantage of this particular design is stability; it was not uncommon for us to leave the interferometer alone for a week or two and return to find the plates still aligned. The three lever-arms allowed for very fine plate adjustments with comparatively course set-screw adjustments.

The Fabry-Perot pattern was sent, via focussing mirror M1, into a Michelson interferometer, one leg of which contained a gas cell. The

Table 2. Laser Lines and Powers

Line	λ (μm)	Maximum Power (Watts)		
		47.3 cm Cavity	75 cm Cavity	87 cm Cavity
$P_1(2)$	2.58	–	.4	.5
$P_1(3)$	2.61	.8	.7	.7
$P_1(4)$	2.64	1.3	1.3	1.4
$P_1(5)$	2.67	1.1	.6	.5
$P_2(2)$	2.70	–	–	.3
$P_1(6)$	2.71	1.7	1.4	1.1
$P_2(3)$	2.73	.8	1.1	1.9
$P_1(7)$	2.74	1.7	.6	1.6
$P_2(4)$	2.76	1.2	1.3	1.3
$P_1(8)$	2.78	1.1	.8	–
$P_2(5)$	2.80	1.6	2.1	2.2
$P_2(6)$	2.83	2.0	2.3	2.3
$P_2(7)$	2.87	1.8	2.1	2.0
$P_2(8)$	2.91	1.2	1.2	1.3

for available gain was high, and without any cavity stabilization, mode jumping occurred regularly with one mode being favored at any particular time. Lowering the cavity pressure to five torr allowed two-mode oscillation, but the modes still raced through the gain curve while power dropped to an unacceptable level.

seen in Fig. 19, the gas flowed transverse to the laser cavity. Hydrogen was injected just upstream of the cavity where it combined with the fluorine to produce the upper lasing state.

The discharge was powered by a Universal Voltronics Corporation Model BAM-13-200H High Voltage Power Supply, and the spent gases were evacuated by a Kinney KT-500 Triplex Vacuum Pump. Because of the pump's excellent operating capacity (> 500 cfm), we were able to extract single-line powers up to two watts on some transitions. Power was measured with a Coherent Model 210 Power Meter, and was maximized at cavity pressures around nine torr. We used three cavity lengths for the experiments: 47.3 cm, 75 cm, and 87 cm. Each cavity included a two-meter-radius rear mirror. Table 2 is a listing of the lines and maximum powers attainable with each cavity.

Since the experiments involved absorption in HF at room temperature, a v(1-0) transition was desired. We chose the $P_1(4)$ and $P_1(6)$ lines because of their good output powers for each of the three cavities.

We naturally needed to generate two or more axial (longitudinal) modes in order to measure fringe shift. It was difficult at times, however, to get two stable modes oscillating and virtually impossible to get three, even on the longest cavity. There were two reasons for this. First, the laser was subject to a lot of vibration coming through the floor of the laboratory, causing modes to race through the gain curve. The second reason involved mode competition caused by pressure-broadening effects. Even at cavity pressures as low as seven torr, competition

a.

b.

Figure 27. Off-Axis View of Combined Interference Pattern

      a. Empty Gas Cell
      b. HF in Gas Cell

a.

b.

Figure 28. Modes of Unequal Intensity

    a. Axially-Symmetric View
    b. Off-Axis View

CHAPTER 5

EXPERIMENTAL RESULTS

Data Reduction

Most of the data taken looked like Fig. 26b. Some, however, resembled Fig. 27b, in which the Fabry-Perot interferometer was moved slightly off axis. We originally thought that this side view was better in that the increased number of dots would enable us to draw better lines for measuring fringe shift. We quickly found, though, that aberrations in the optical system often prevented us from drawing straight lines at all. Therefore, we abandoned this approach early in the experiment, and, with the exception of a few sets of "readable" data of this kind, all are like Fig. 26b.

Each data point was read by first marking the center (high-intensity point) of each dot with a scribing tool. Since this involved subjective judgment, three people read pictures and the results were averaged. Once the centers were determined, lines were drawn between dot pairs as shown in Fig. 29. A single vertical line was drawn down the center. Then, using a binocular microscope, we measured (along this center line) an average Michelson spacing and an average fringe displacement between the two modes. The ratio of the two numbers gave us a percent fringe shift for that picture. All such numbers for the same pressure and cavity length were then averaged and a standard deviation was computed. It should be noted here that each average value typically

Figure 29.   Data Point Prepared for Measuring Fringe Shift

included over 20 different data points (accumulated at different times) for the same pressure and cavity configuration. Using three readers gave us independent measurements of the same data points. Thus, the computed error bars represent not only the scatter in the various readings, but a measure of the experimental reproducibility as well.

We converted a percent fringe-shift value to a difference in refractive index "seen" by the two modes by using

$$\Delta(n-1) = (\lambda/2\mathcal{L})(\%\text{shift}) , \tag{5.1}$$

where $\mathcal{L}$ represents the length of the gas cell. Note that the factor of two in the denominator appears because the beam passes through the cell twice. The experiment could be performed with a Mach Zehnder interferometer and the factor of two would be absent.

Tabulated results for both the unsaturated and saturated experiments are contained in Appendix C. Figures 30 through 37 contain plots of those results along with the theoretical curves.

Determining the Mode Spacing

An accurate determination of the frequency separation between modes was necessary in constructing the theoretical plots shown in Figs. 30 through 35. We did this both by calculation and by two experimental methods. Each is now briefly described.

Calculating the Mode Pulling

Frequency pulling is a direct result of the anomalous refractive index of the gain medium. Modes which are oscillating away from line

Figure 30. Theoretical and Experimental Unsaturated Results for $P_1(4)$ Line, 47.3 cm Cavity

Figure 31. Theoretical and Experimental Unsaturated Results for $P_1(4)$ Line, 75 cm Cavity

Figure 32. Theoretical and Experimental Unsaturated Results for $P_1(4)$
Line, 87 cm Cavity

Figure 33. Theoretical and Experimental Unsaturated Results for $P_1(6)$ Line, 47.3 cm Cavity

Figure 34. Theoretical and Experimental Unsaturated Results for $P_1(6)$ Line, 75 cm Cavity

Figure 35. Theoretical And Experimental Unsaturated Results for $P_1(6)$ Line, 87 cm Cavity

Figure 36. Theoretical and Experimental Saturated Results for P₁(4) Line, 47.3 cm Cavity

Figure 37. Theoretical and Experimental Saturated Results for $P_1(4)$ Line, 75 cm Cavity

center are "pulled" from their passive cavity position ν_m to a frequency closer to line center, implying a reduction from the passive-cavity free spectral range, $\Delta\nu_m = c/2L$, to a slightly smaller value.

For a cavity of length L containing a gain medium of length ℓ, the round-trip phase condition necessary for a mode to oscillate is

$$2\pi m = \frac{2\pi}{\lambda} (OPL) = \frac{2\pi\nu}{c} [n(\nu)2\ell + 2L - 2\ell], \qquad (5.2)$$

where OPL is the optical path length, $n(\nu)$ is the index of refraction of the gain medium, and m is an integer. This can be written

$$\frac{mc}{2L} = \nu_m = \nu \{1 + \frac{\ell}{L} [n(\nu) - 1]\} . \qquad (5.3)$$

Using Lamb's model, Donald Close (1967) developed the following equation for the frequency-dependent index of refraction of a Doppler-broadened amplifying medium

$$n(\nu) = 1 + \frac{cg_c F(x)}{2\pi^{3/2}} , \qquad (5.4)$$

where

$$F(x) = e^{-x^2} \int_0^x e^{t^2} dt , \qquad (5.5)$$

$$x = \left[\frac{2(\nu - \nu_0)}{\Delta\nu} \right] \sqrt{\ln 2} , \qquad (5.6)$$

MICROCOPY RESOLUTION TEST CHART

NATIONAL BUREAU OF STANDARDS-1963-A

and g_0 is the small-signal gain coefficient at line center. Note that this equation is valid only when: (a) the homogeneous linewidth is negligible compared with the Doppler linewidth, or $\Delta\nu_H \ll \Delta\nu_D$; and (b) saturation is unimportant (Casperson and Yariv, 1970). Since neither of these conditions is clearly the case for our laser, the utility of this equation lies exclusively in the fact that it provides us a maximum possible mode-pulling value.

Using Eq. (5.4) for the index, Eq. (5.3) becomes

$$\nu_m - \nu \approx \frac{\ell}{L} \frac{c g_0 F(x)}{2\pi^{3/2}} \quad . \tag{5.7}$$

In non-dimensional form,

$$x_m - x = \beta F(x) \quad , \tag{5.8}$$

where

$$\beta \equiv \frac{\ell}{L} \frac{c g_0 \sqrt{\ln 2}}{\pi^{3/2} \Delta\nu_D} \tag{5.9}$$

and for two modes equidistant from line center,

$$x_m \equiv \frac{\sqrt{\ln 2}}{\Delta\nu_D} \Delta\nu_m \tag{5.10}$$

and

$$x \equiv \frac{\sqrt{\ln 2}}{\Delta \nu_D} \Delta \nu \quad . \tag{5.11}$$

Using a cavity temperature of 400°K, we solved Eq. (5.8) with an iterative approach, using tabulated values for F (Mitchell and Zemansky, 1971). The results are contained in Table 3.

Table 3. Theoretical Mode-Pulling Corrections

ℓ (cm)	L (cm)	$\Delta\nu_m$ (MHz)	$P_1(4)$		$P_1(6)$	
			β	$\Delta\nu$ (MHz)	β	$\Delta\nu$ (MHz)
15	47.3	317	.117	292	.120	291
15	75	200	.074	188	.076	188
15	87	172	.064	163	.065	162
$\Delta\nu_D$ (MHz)			364		355	

We observe from these results that, even with no saturation in the laser cavity, mode pulling accounts for a reduction in mode spacing of less than 10% of the passive spacing.

Measuring Mode Spacing From the Fabry-Perot Pattern

With the beam bypassing the Michelson interferometer, the Fabry-Perot pattern displays the two axial laser modes as in Fig. 38. We may use this picture to measure mode spacing by first considering the

Figure 38. Fabry-Perot Pattern

Figure 39. Fabry-Perot Interferometer

arrangement shown in Figure 39. For monochromatic light, a bright ring
will appear at an angle θ satisfying

$$\cos\theta = \frac{m\lambda}{2h} \ , \tag{5.12}$$

where m is an integer. For θ small, this may be written

$$1 - \frac{\theta^2}{2} \cong \frac{m\lambda}{2h} \ , \tag{5.13}$$

or

$$\theta^2 \cong \frac{\lambda}{h} \left(\frac{2h}{\lambda} - m\right) = \frac{\lambda}{h} \ (m_{max} - m) \ , \tag{5.14}$$

where here m_{max} is the fractional order at the center of the pattern.
The square of the radius for a bright ring in the image plane is just

$$r^2 \cong (D\theta)^2 = D^2 \frac{\lambda}{h} \ (m_{max} - m) \ , \tag{5.15}$$

where D is the distance to the image plane. The important thing to note
about this result is that the area between successive rings is a
constant. Thus, for a pattern containing two frequencies, such as shown
in Fig. 38, mode spacing is determined simply by dividing the area
between two adjacent modes by the area between two consecutive orders of
the same mode, and multiplying by the free spectral range of the
interferometer

$$\Delta \nu = \frac{\pi(r_2^2 - r_1^2)}{\pi(r_3^2 - r_1^2)} \Delta \nu_{FSR} \quad . \tag{5.16}$$

Here, r_1, r_2 and r_3 are the radii of the first three rings, respectively.

The plate separation for the Fabry-Perot was 20.7 cm, corresponding to a free spectral range (724.6 MHz) large enough to prevent overlapping of orders.

Since the pattern was not perfectly round, we measured ring diameters both horizontally and vertically, and then averaged the results. These are contained in Table 4. The standard deviation represents the scatter in the measurements.

Table 4. Fabry-Perot Mode-Spacing Measurements

	$P_1(4)$		$P_1(6)$	
L (cm)	$\Delta \nu$ (MHz)	σ (MHz)	$\Delta \nu$ (MHz)	σ (MHz)
47.3	292	17.1	251	14.5
75	119	15.3	107	16.9
87	130	14.6	123	9.8

There are several reasons that the $P_1(4)$ short-cavity results are much more reliable than the others. First, we took many more pictures to analyze for this configuration. Second, the pictures were

much sharper (had better contrast). Finally, we encountered
intermittent oscillation of transverse modes (particularly on the
longer cavities but also for the $P_1(6)$ line on the short cavity) which
tended to smear out the rings radially.

Measuring Mode Spacing by Beats

We successfully measured the beat frequency between modes by
using a Santa Barbara Research Center Model 40742 Ge-Au Infrared
Detector and a Tektronix 7L13 Spectrum Analyzer. Figure 40 contains
calibration pictures for the spectrum analyzer, while Fig. 41 shows the
beats for the $P_1(4)$ line on both the 47.3 cm and 75 cm cavities.
Measuring several pictures like Fig. 41 yielded a measured mode spacing
of 289.4 MHz for the 47.3 cm cavity and 190.2 MHz for the 75 cm cavity.
Similar measurements for the $P_1(6)$ line gave essentially identical
results.

Of the three methods for determining mode separation, measuring
the beats was most reliable. It is interesting that these results match
closely those calculated earlier for an unsaturated laser. Thus, we
decided to use the following values for our theoretical calculations:

$$\Delta\nu(47.3 \text{ cm}) = 290 \text{ MHz} \tag{5.17}$$

$$\Delta\nu(75 \text{ cm}) = 190 \text{ MHz} \tag{5.18}$$

$$\Delta\nu(87 \text{ cm}) = 160 \text{ MHz} \tag{5.19}$$

Determining the Saturation Intensity

As mentioned earlier, we sequentially measured power through
various-sized holes placed just behind the front window of the gas cell.

a.

b.

Figure 40. Spectrum Analyzer Calibration

        a. 100 MHz/Division
        b. 50 MHz/Division

a.

b.

Figure 41. Beat Measurements for $P_1(4)$ Line

    a. 47.3 cm Cavity
    b. 75 cm Cavity

We thus obtained a picture of the beam intensity profile (Fig. 42), which is Gaussian for TEM_{00}. We calculated a value for saturation intensity from the linear portion of the curve, yielding

$$I(47.3 \text{ cm}) = 17.6 \text{ W/cm}^2 , \tag{5.20}$$

$$I(75 \text{ cm}) = 26.1 \text{ W/cm}^2 , \tag{5.21}$$

where each value represents the total intensity of the beam (including both axial modes).

a.

b.

Figure 42. Intensity Profiles for $P_1(4)$ Line

   a. 47.3 cm Cavity
   b. 75 cm Cavity

CHAPTER 6

DISCUSSION

We see in Figs. 30 through 32 that the experimental data for the
$P_1(4)$ line match closely the theoretically-predicted curves for combined
Doppler and pressure broadening. It is clear that pressure-broadening
effects cannot be neglected, even for pressures as low as one torr.
Beyond 1 1/2 torr, the experimental values fall slightly below the
theoretical curve for reasons not fully understood. However, the fact
that the error bars generally grow as the pressure increases is not
surprising since the fringe contrast decreases as the pressure increases
(see next section).

The trends are not as well established for the $P_1(6)$ line
because of the comparatively small amount of data points. We see,
though (especially for the short cavity), that the experimental values
follow the combined-broadening curve, with no drop-off at higher
pressures.

With the $P_1(4)$ transition partially saturated, the experimental
values depart from the unsaturated theoretical curve at noticeably lower
pressures than for the unsaturated experimental values. This departure
occurs at about .75 torr for the 47.3 cm cavity and .5 torr for the
75 cm cavity (Figs. 36 and 37). We see also that the line broadening
rate $\pi\Delta\nu_{||}$ is too high, whereas the gas kinetic rate is too low. However,
the intermediate rate $\pi\Delta\nu_{||}/10$ offers a nice fit of the experimental

```
1050    LABEL I
1060    I=I+100
1070    IF I=0 THEN I=100
1080    GOTO 1030
1090    LORG 8
1100    FOR I=-1.E-4 TO 1.E-4 STEP 1.E-4
1110    IF I=0 THEN I=1.E-4
1120    MOVE 0,I
1130    H=I*1.E+4
1140    LABEL H
1150    NEXT I
1160    LORG 3
1170    MOVE -125,1.2E-4
1180    LABEL "(n-1)x10 "
1190    MOVE 0,-1.265E-4
1200    LORG 5
1210    LABEL "  Frequency Difference From Line Center (MHz)"
1220    INPUT "Enter the pressure:",B
1230    INPUT "Enter the Doppler broadened linewidth:",C
1240    INPUT "Enter the pressure broadening per torr:",O
1250    IF W=2 THEN INPUT "Enter the wavelength:",F
1260    S=O*B !Pressure Broadened Linewidth
1270    IF K=1 THEN MOVE 220,1.08E-4
1280    IF K=1 THEN LABEL "Partially-Saturated"
1290    MOVE 220,1.0E-4
1300    LABEL "Index of Refraction for"
1310    MOVE 220,9.2E-5
1320    LABEL "P_1(4) Line at";B;"Torr"
1330    MOVE 220,8.4E-5
1340    LABEL "     =";C;"MHz;    =";S;"MHz "
1350    IF W=1 THEN GOTO 1910
1360    IF L=2 THEN PRINT "Type the name of the"
1370    IF L=2 THEN INPUT "absorption file:",N$
1380    IF L=2 THEN ASSIGN @F TO N$
1390    IF L=2 THEN ENTER @F;Z(*)
1400    G=F/(4*(PI)^2)
1410    V=400
1420    Y=0
1430    FOR X=1 TO 1201 STEP 1
1440    IF ABS(Z(X,1)-V)>2.1 THEN Y=Y+G*5*Z(X,2)*1/(Z(X,1)-V)
1450    IF ABS(Z(X,1)-V)<2.1 THEN Y=Y
1460    NEXT X
1470    MOVE V,Y
1480    PRINT TABXY(1,1),"Do you wish to compute a data file?"
1490    INPUT "Yes (1), No (2)",P
1500    PRINT TABXY(1,1),"                                    "
1510    IF P=1 THEN GOTO 1610
1520    Y=0
1530    FOR X=1 TO 1201 STEP 1
1540    IF ABS(Z(X,1)-V)>2.1 THEN Y=Y+G*5*Z(X,2)*1/(Z(X,1)-V)
1550    IF ABS(Z(X,1)-V)<2.1 THEN Y=Y
1560    NEXT X
```

```
530    MOVE 0,-.75
540    LABEL " Frequency Difference From Line Center (MHz)"
550    INPUT "Enter the pressure:",B
560    INPUT "Enter the Doppler broadened linewidth:",C
570    INPUT "Enter the pressure broadening per torr:",O
580    S=O*B !Pressure Broadened Linewidth
590    IF K=1 THEN MOVE 220,6.81
600    IF K=1 THEN LABEL "Partially-Saturated"
610    MOVE 220,6.54
620    LABEL "Absorption Coefficient"
630    MOVE 220,6.27
640    LABEL "for P₁(4) Line at";B;"Torr"
650    MOVE 220,6
660    LABEL "    =";C;"MHz;    =";S;"MHz "
670    MOVE Z(521,1),Z(521,2)
680    FOR T=522 TO 681 STEP 1
690    DRAW Z(T,1),Z(T,2)
700    NEXT T
710    R=0
720    FOR T=1 TO 1201 STEP 1
730    R=R+Z(T,2)
740    NEXT T
750    S=5*R
760    PRINT TABXY(1,1),"The area under the curve        "
770    PRINT "is";S;"units.                             "
780    PRINT "Would you like to run                     "
790    PRINT "a dispersion curve?                       "
800    INPUT "Yes(1), No(2)",U
810    PRINT TABXY(1,1),"                                "
820    PRINT TABXY(1,2),"                                "
830    PRINT TABXY(30,2),"                               "
840    PRINT TABXY(1,3),"                                "
850    PRINT TABXY(1,4),"                                "
860    ASSIGN @F TO *
870    IF U=2 THEN GOTO 2220
880    INPUT "After inserting fresh paper, enter a 1.",W
890    GCLEAR
900    !Dispersion Curve
910    PRINT TABXY(1,1),"Have you computed               "
920    PRINT TABXY(1,2),"a dispersion curve?             "
930    INPUT "Yes(1), No(2)",W
940    PRINT TABXY(1,1),"                                "
950    PRINT TABXY(1,2),"                                "
960    WINDOW -480,480,-1.5E-4,1.6E-4
970    CLIP -420,420,-1.2E-4,1.2E-4
980    AXES 50,5.E-5,0,0
990    CLIP OFF
1000   CSIZE 3
1010   LORG 6
1020   I=-400
1030   IF I)400 THEN GOTO 1090
1040   MOVE I,-3.5E-6
```

```
10      !Program Title: ABDIS4
20      !Program Function A: Anomalous Dispersion Computation
30      !                   for P_1(4) Line
40      !Program Function B: Absorption and Dispersion Plots
50      !                   for P_1(4) Line
60      GINIT
70      PLOTTER IS 705,"HPGL"
80      GRAPHICS ON
90      INPUT "Are we saturated (1) or unsaturated (2)?",K
100     PRINT "Insert data disk                              "
110     PRINT "in right-hand drive.                          "
120     INPUT "Enter a 1.",J
130     PRINT TABXY(1,1),"                                   "
140     PRINT TABXY(1,2),"                                   "
150     OPTION BASE 1
160     DIM Z(1205,2)
170     DIM E(165,2)
180     MASS STORAGE IS ":HP82901,700,1"
190     PRINT TABXY(1,1),"Do you want absorption             "
200     PRINT TABXY(1,2),"or dispersion?                     "
210     INPUT "Absorption (1), Dispersion (2)",L
220     PRINT TABXY(1,1),"                                   "
230     PRINT TABXY(1,2),"                                   "
240     IF L=2 THEN GOTO 910
250     !Absorption Curve
260     PRINT TABXY(1,2),"                                   "
270     PRINT TABXY(1,1),"Type the name of the file          "
280     PRINT "to be accessed:                              "
290     INPUT N$
300     PRINT TABXY(1,1),"                                   "
310     PRINT TABXY(1,2),"                                   "
320     ASSIGN @F TO N$
330     ENTER @F;Z(*)
340     WINDOW -480,480,-1.5,8.8
350     CLIP -420,420,-.001,7.5
360     AXES 50,1,0,0
370     CLIP OFF
380     CSIZE 3
390     LORG 6
400     I=-400
410     IF I>400 THEN GOTO 470
420     MOVE I,0
430     LABEL I
440     I=I+100
450     IF I=0 THEN I=100
460     GOTO 410
470     LORG 8
480     FOR I=1 TO 7 STEP 2
490     MOVE 0,I
500     LABEL I
510     NEXT I
520     LORG 5
```

```
530     PRINT "Insert data disk in right-hand drive.        "
540     INPUT "Enter a 1.",J
550     PRINT TABXY(1,3),"                                    "
560     PRINT "Type the name of the file you wish to store:  "
570     INPUT U$
580     MASS STORAGE IS ":HP82901,700,1"
590     CREATE BDAT U$,1210,16
600     ASSIGN @F TO U$
610     OUTPUT @F;E(*)
620     S=(2*M-E(601,2))*5
630     MASS STORAGE IS ":HP82901,700,0"
640     END
```

```
10      !Program Title: ABSAT
20      !Program Function: Saturated Absorption Curve
30      !                  Computation for Impure Broadening
40      GINIT
50      OPTION BASE 1
60      DIM Z(1205,6)
70      DIM E(1205,2)
80      PRINT "Enter the Doppler broadened                    "
90      PRINT "absorption coefficient per torr:               "
100     INPUT A
110     PRINT TABXY(1,1),"                                    "
120     PRINT TABXY(1,2),"                                    "
130     INPUT "Enter the pressure:",B
140     INPUT "Enter the Doppler broadening:",C
150     INPUT "Enter the pressure broadening per torr:",D
160     F=A*B                    !Old Ko
170     G=D*B          !Total Pressure Broadening
180     R=PI*G*1.E+6
190     H=SQR(LOG(2))
200     L=-95
210     O=95
220     I=26.09
230     T=1
240     FOR X=-3000 TO 3000 STEP 5
250     N=5.632E+13*B*EXP((-1)*(.0053*X)^2)
260     Z(T,1)=X
270     Z(T,2)=N
280     W=(1/(1+(2*(X-L)/G)^2)+1/(1+(2*(X-O)/G)^2))
290     Z(T,3)=F*EXP((-1)*(2*X*H/C)^2)/N*W
300     Z(T,4)=N/(2.286+R/(1.33E+19*Z(T,3)*I))
310     Z(T,5)=Z(T,2)-Z(T,4)
320     Z(T,6)=F*Z(T,5)/Z(T,2)*(1-9*Z(T,4)/(7*Z(T,5)))
330     T=T+1
340     NEXT X
350     V=-3000
360     M=0
370     T=1
380     Y=0
390     Q=2/(PI*G)
400     FOR X=-3000 TO 3000 STEP 5
410     P=Q*Z(T,6)
420     Y=Y+5*P*EXP((-1)*(2*X*H/C)^2)/(1+(2*(V-X)/(B*D))^2)
430     NEXT X
440     E(T,1)=V
450     E(T,2)=Y
460     E(1202-T,1)=-V
470     E(1202-T,2)=Y
480     T=T+1
490     M=M+Y
500     V=V+5
510     IF V>0 THEN GOTO 530
520     GOTO 380
```

```
10      !Program Title: ABUNSAT
20      !Program Function: Unsaturated Absorption Curve
30      !                  Computation for Impure Broadening
40      GINIT
50      OPTION BASE 1
60      DIM Z(1205,2)
70      PRINT "Enter the Doppler broadened              "
80      PRINT "absorption coefficient per torr:         "
90      INPUT A
100     PRINT TABXY(1,1),"                             "
110     PRINT TABXY(1,2),"                             "
120     INPUT "Enter the pressure:",B
130     INPUT "Enter the Doppler broadening:",C
140     INPUT "Enter the pressure broadening per torr:",D
150     P=2*A/(PI*D)
160     M=SQR(LOG(2))
170     V=-3000
180     R=0
190     T=1
200     Y=0
210     FOR X=-3000 TO 3000 STEP 5
220     IF ABS(V-X)>3000 THEN GOTO 240
230     Y=Y+5*P*EXP((-1)*(2*(V-X)*M/C)^2)/(1+(2*X/(B*D)))^2)
240     NEXT X
250     Z(T,1)=V
260     Z(T,2)=Y
270     Z(1202-T,1)=-V
280     Z(1202-T,2)=Y
290     T=T+1
300     R=R+Y
310     V=V+5
320     IF V>0 THEN GOTO 340
330     GOTO 200
340     PRINT "Insert data disk in right-hand drive.   "
350     INPUT "Enter a 1.",J
360     PRINT TABXY(1,3),"                             "
370     PRINT "Type the name of the file you wish to store  "
380     INPUT N$
390     MASS STORAGE IS ":HP82901,700,1"
400     CREATE BDAT N$,1210,16
410     ASSIGN @F TO N$
420     OUTPUT @F;Z(*)
430     S=(2*R-Z(601,2))*5
440     MASS STORAGE IS ":HP82901,700,0"
450     END
```

APPENDIX A

COMPUTER PRINTOUT

Contained here are the computer programs used to generate
absorption and dispersion profiles, from which the theoretical curves
found in Figs. 30 - 37 were obtained.

CONCLUSION

A crossed interferometer technique has been successfully used to measure the anomalous dispersion of two ground-state HF transitions in absorption. Results were in close agreement with theoretically predicted values. The method also gave meaningful results when the transition was partially saturated.

A distinct advantage of the technique over the many other attempts at measuring anomalous dispersion is the spatial resolution of the axial modes by a Fabry-Perot interferometer. The implication is that the entire anomalous dispersion curve can be sampled at the same time, limited only by the number of axial modes. It is realistic to expect the technique to successfully work for a saturated gain medium. In principle, the technique offers the potential for measuring the time-evolution of the anomalous dispersion in a pulsed laser.

Our theory used a constant value for the intensity distribution of the saturating beam, which, of course, is only a crude approximation, since at best, the laser beam had a Gaussian intensity profile. Consequently, the medium saturated spatially in a nonuniform fashion, thereby complicating the picture.

Assuming throughout the experimental runs that the HF gas was pure was probably reasonable since, before using the lecture-grade gas, we froze it with liquid nitrogen and pumped on the system to remove any impurities. Also, even though HF is highly polymerized at temperatures below 70°C (Meredith, 1972), the presence of dimers was insignificant for the low pressures at which we operated.

Finally, the measurement technique itself was subjective, and, hence, open to error. This is why three of us read data and averaged the results. An improvement of any of the previously mentioned limitations would serve to eliminate some of this subjectivity. We considered, at one point in the experiment, making a digital readout of the data points, but the large volume of data to be read made this an impractical option.

difficult to eliminate and made it impossible to obtain meaningful data. So we removed the lens and proceeded with less intensity.

Another limitation was the simple fact that one leg of the Michelson interferometer contained an absorbing cell. At higher gas pressures, the intensities in the two interferometer legs were unequal, and so the fringes had less contrast. A compensator plate inserted in the other leg improved contrast, but diminished overall intensity to an unacceptable level. Thus, we accomplished all readings without the plate. The larger error bars at higher pressures reflect this increasing loss of contrast. Since absorption is proportional to the product of pressure and length of the absorbing layer, one way to make more accurate readings at higher pressures would be to shorten the cell.

Ensuring equal intensity for both axial modes was another area subject to error. The theoretical curves (Figs. 30-35) were computed based on the assumption that the modes were equidistant from line center. Practically, we applied pressure to the grating mount until two modes of equal intensity appeared on the television monitor. This was a subjective evaluation and could likely have been improved upon by using detectors. However, the utility of a more elaborate arrangement is questionable since axial modes generally fall on a fairly linear portion of the refractive index curve.

Transverse modes other than TEM_{00} were evident at times, particularly for the two longer cavities. While not terribly bothersome, they tended to exaggerate the mode width and interfered with an accurate determination of the high-intensity spot of a fringe.

Figure 43.   Improperly Coated Fabry-Perot Plates

This number agrees well with the standard deviations of our measurements. The way to improve resolution, of course, is to use larger plates. For example, standard two-inch plates would reduce the above figure by a factor of two. However, large pieces of calcium fluoride are exceedingly difficult to coat, as evidenced in Fig. 43. We had ordered these two-inch plates from a company that specializes in coating substrates, but the coatings were detached from the plates on their arrival.

Optical aberrations proved to be another obstacle to accurate measurements, and are particularly evident in Fig. 38, where we notice that the Fabry-Perot pattern is not perfectly round, as it should be. The slight oval shape is possibly due to strain in one or both of the interferometer plates. The possible range of error due to the lack of roundness is just the difference between the horizontal and vertical axis measurements. This difference corresponds to approximately 35 MHz. The mode-spacing measurements (Table 4) arising from the pattern are rightly suspect, and consequently were not considered in determining the actual mode spacing.

Other aberrations occurred as well. At one point during the nonsaturated measurements, we inserted a CaF_2 lens just prior to the Fabry-Perot interferometer to reduce the divergence of the light entering the interferometer (it served as the output lens of a telescope). The lens acted to illuminate a smaller portion of the pattern and offer more intensity to the portion illuminated. It also, however, created aberrations (seen in the crossed interferometer pattern) that were

$$\Delta\nu_{res} = \frac{\lambda\nu}{2\mathcal{F}L} = \frac{c}{2\mathcal{F}L} \quad , \tag{6.3}$$

and, ignoring for now the diffraction limit, the best resolution we could expect with our 20.7 cm interferometer would be just under 5 MHz.

Now, the angular separation of adjacent orders near the center of a Fabry-Perot pattern is on the order of $\sqrt{\lambda/L}$. Following Rayleigh's criterion, the minimum angular separation that can be resolved through a circular diffracting aperture is

$$.61 \frac{\lambda}{a} \cong \frac{\lambda}{D} \quad , \tag{6.4}$$

where a and D are, respectively, the radius and diameter of the diffracting aperture. We thus have an imposed upper bound on finesse

$$\mathcal{F} \leqslant \frac{\sqrt{\lambda/L}}{\lambda/D} = \frac{D}{\sqrt{\lambda L}} \quad , \tag{6.5}$$

even for perfectly reflecting mirrors. If we assume that the entire one-inch diameter of the plates is filled with light, then for our interferometer,

$$\mathcal{F} \leqslant \frac{2.5}{\sqrt{2.7 \times 10^{-4}(20.7)}} = 33.4 \tag{6.6}$$

and

$$\Delta\nu_{res} \leqslant \frac{3 \times 10^{10}}{2(33.4)(20.7)} = 21.7 \text{ MHz}. \tag{6.7}$$

data. Hence, at the low pressures and saturation levels at which we are operating, for which the model appears to be valid, the experimentally-determined state-altering, velocity-changing collision rate is seen to be $K = \pi \Delta \nu_H / 10 = 11 \times 10^6$ /sec-torr.

Experimental Limitations

There were a number of limitations that kept us from realizing the best accuracy possible. These are briefly discussed here.

Probably the most important physical limitation was the small-diameter plates of the Fabry-Perot interferometer (only a 2 cm open aperture). Although we endeavored to fill the entire plate area with light, the physical size imposed a diffraction limit on the resolution attainable with the instrument.

For infinitely large and perfectly flat plates, the finesse is limited only by the reflectance (R) of the mirror surfaces

$$\mathcal{F} = \frac{-\sqrt{R}}{1 - R} \, , \tag{6.1}$$

which, for R = .98, is about 156. Now, the finesse relates to the resolution ($\mathcal{R}$) by

$$\mathcal{R} = \frac{\nu}{\Delta \nu_{res}} = \frac{2L}{\lambda} \, \mathcal{F} \, , \tag{6.2}$$

where $\Delta \nu_{res}$ is the minimum resolvable frequency difference and L is the Fabry-Perot mirror separation. So,

```
1570    DRAW V,Y
1580    V=V+5
1590    IF V>400 THEN GOTO 2120
1600    GOTO 1520
1610    T=1
1620    Y=0
1630    FOR X=1 TO 1201 STEP 1
1640    IF ABS(Z(X,1)-V)>2.1 THEN Y=Y+G*5*Z(X,2)*1/(Z(X,1)-V)
1650    IF ABS(Z(X,1)-V)<2.1 THEN Y=Y
1660    NEXT X
1670    E(T,1)=V
1680    E(T,2)=Y
1690    DRAW V,Y
1700    IF T=52 THEN PRINT V
1710    IF T=52 THEN PRINT Y
1720    IF T=62 THEN PRINT V          !Index of Refraction Values
1730    IF T=62 THEN PRINT Y          !for the Three Cavities
1740    IF T=65 THEN PRINT V
1750    IF T=65 THEN PRINT Y
1760    T=T+1
1770    V=V+5
1780    IF V>400 THEN GOTO 1800
1790    GOTO 1620
1800    PRINT TABXY(1,1),"Insure data disk              "
1810    PRINT TABXY(1,2),"is in right-hand drive.        "
1820    INPUT "Enter a 1.",O
1830    PRINT TABXY(1,2),"                              "
1840    PRINT TABXY(1,1),"Type the name of the file     "
1850    PRINT TABXY(1,2),"you wish to store.            "
1860    INPUT N$
1870    CREATE BDAT N$,170,16
1880    ASSIGN @F TO N$
1890    OUTPUT @F;E(*)
1900    GOTO 2120
1910    PRINT TABXY(1,1),"Insure data disk              "
1920    PRINT TABXY(1,2),"is in right-hand drive.        "
1930    INPUT "Enter a 1.",O
1940    PRINT TABXY(1,2),"                              "
1950    PRINT TABXY(1,1),"Type the name of the file     "
1960    PRINT TABXY(1,2),"to be accessed                "
1970    INPUT N$
1980    PRINT TABXY(1,1),"                              "
1990    PRINT TABXY(1,2),"                              "
2000    ASSIGN @F TO N$
2010    ENTER @F;E(*)
2020    MOVE E(1,1),E(1,2)
2030    FOR T=1 TO 161 STEP 1
2040    DRAW E(T,1),E(T,2)
2050    IF T=52 THEN PRINT TABXY(1,7),E(T,1)
2060    IF T=52 THEN PRINT E(T,2)
2070    IF T=62 THEN PRINT E(T,1) !Index of Refraction Values
2080    IF T=62 THEN PRINT E(T,2) !for the Three Cavities
```

```
2090    IF T=65 THEN PRINT E(T,1)
2100    IF T=65 THEN PRINT E(T,2)
2110    NEXT T
2120    PRINT TABXY(1,1),"Do you wish to run                          "
2130    PRINT TABXY(1,2),"an absorption curve?                        "
2140    INPUT "Yes (1), No (2)",M
2150    PRINT TABXY(1,1),"                                            "
2160    PRINT TABXY(1,2),"                                            "
2170    IF M=1 THEN PRINT TABXY(1,1),"After inserting fresh  "
2180    IF M=1 THEN PRINT TABXY(1,2),"paper, enter a 1       "
2190    IF M=1 THEN INPUT N
2200    IF M=1 THEN GCLEAR
2210    IF M=1 THEN GOTO 250
2220    MASS STORAGE IS ":HP82901,700,0"
2230    END
```

```
10      !Program Title: DISPURE4
20      !Program Function: Dispersion Curve Computation & Plot
30      !                    for P₁(4) Line with Pure Broadening
40      GINIT
50      PLOTTER IS 705,"HPGL"
60      GRAPHICS ON
70      WINDOW -480,480,-1.5E-4,1.6E-4
80      CLIP -420,420,-1.2E-4,1.2E-4
90      AXES 50,5.E-5,0,0
100     CLIP OFF
110     CSIZE 3
120     LORG 6
130     I=-400
140     IF I>400 THEN GOTO 200
150     MOVE I,-3.5E-6
160     LABEL I
170     I=I+100
180     IF I=0 THEN I=100
190     GOTO 140
200     LORG 8
210     FOR I=-1.E-4 TO 1.E-4 STEP 1.E-4
220     IF I=0 THEN I=1.E-4
230     MOVE 0,I
240     H=I*1.E+4
250     LABEL H
260     NEXT I
270     LORG 3
280     MOVE -125,1.2E-4
290     LABEL "(n-1)x10 "
300     MOVE 0,-1.265E-4
310     LORG 5
320     LABEL "  Frequency Difference From Line Center (MHz)"
330     PRINT "Are we Doppler or pressure broadened?       "
340     INPUT "Doppler (1), Pressure (2)",S
350     PRINT TABXY(1,1),"                                  "
360     IF S=1 THEN M=3.018E+6
370     IF S=2 THEN M=2.045E+6
380     INPUT "Enter the A Coefficient:",A
390     INPUT "Enter the pressure:",B
400     IF S=1 THEN INPUT "Enter the Doppler linewidth:",C
410     IF S=2 THEN INPUT "Enter the pressure linewidth.",C
420     INPUT "Enter the upper J:",D
430     INPUT "Enter the lower J:",H
440     INPUT "Enter the wavelength:",F
450     MOVE 220,1.E-4
460     IF S=1 THEN GOTO 490
470     IF S=2 THEN LABEL "Pressure Broadened Index"
480     GOTO 500
490     LABEL "Doppler Broadened Index"
500     MOVE 220,9.2E-5
510     LABEL "of Refraction for P₁(4)"
520     MOVE 220,8.4E-5
```

```
530    LABEL "at";B;"Torr"
540    G=M*B*A*(2*D+1)*(F^3)*EXP(-.10144*H*(H+1))/C
550    IF S=1 THEN GOTO 780
560    V=-400
570    Y=0
580    FOR X=-1500 TO 1500 STEP 5
590    IF ABS(X-V)>2.1 THEN Y=Y+G*5/(1+4*(X)^2/C^2)*1/(X-V)
600    IF ABS(X-V)<2.1 THEN Y=Y
610    NEXT X
620    MOVE V,Y
630    Y=0
640    FOR X=-1500 TO 1500 STEP 5
650    IF ABS(X-V)>2.1 THEN Y=Y+G*5/(1+4*(X)^2/C^2)*1/(X-V)
660    IF ABS(X-V)<2.1 THEN Y=Y
670    NEXT X
680    DRAW V,Y
690    IF V=-145 THEN PRINT V
700    IF V=-145 THEN PRINT Y
710    IF V=-95 THEN PRINT V
720    IF V=-95 THEN PRINT Y
730    IF V=-80 THEN PRINT V
740    IF V=-80 THEN PRINT Y
750    V=V+5
760    IF V>400 THEN GOTO 1020
770    GOTO 630
780    V=-400
790    Y=0
800    FOR X=-400 TO 400 STEP 5
810    W=EXP((-1)*(2*X*SQR(LOG(2))/C)^2)
820    IF ABS(X-V)>2.1 THEN Y=Y+G*5*W*1/(X-V)
830    IF ABS(X-V)<2.1 THEN Y=Y
840    NEXT X
850    MOVE V,Y
860    Y=0
870    FOR X=-400 TO 400 STEP 5
880    W=EXP((-1)*(2*X*SQR(LOG(2))/C)^2)
890    IF ABS(X-V)>2.1 THEN Y=Y+G*5*W*1/(X-V)
900    IF ABS(X-V)<2.1 THEN Y=Y
910    NEXT X
920    DRAW V,Y
930    IF V=-145 THEN PRINT V
940    IF V=-145 THEN PRINT Y
950    IF V=-95 THEN PRINT V
960    IF V=-95 THEN PRINT Y
970    IF V=-80 THEN PRINT V
980    IF V=-80 THEN PRINT Y
990    V=V+5
1000   IF V>400 THEN GOTO 1020
1010   GOTO 860
1020   END
```

APPENDIX B

FABRY-PEROT INTERFEROMETER MOUNT

Figure 44 is a close-up view of the Fabry-Perot mount, in which details can be seen. Figure 45 is a copy of the blueprint used in its construction. This mount was designed by Carl Pelander of the Joint Institute for Laboratory Astrophysics.
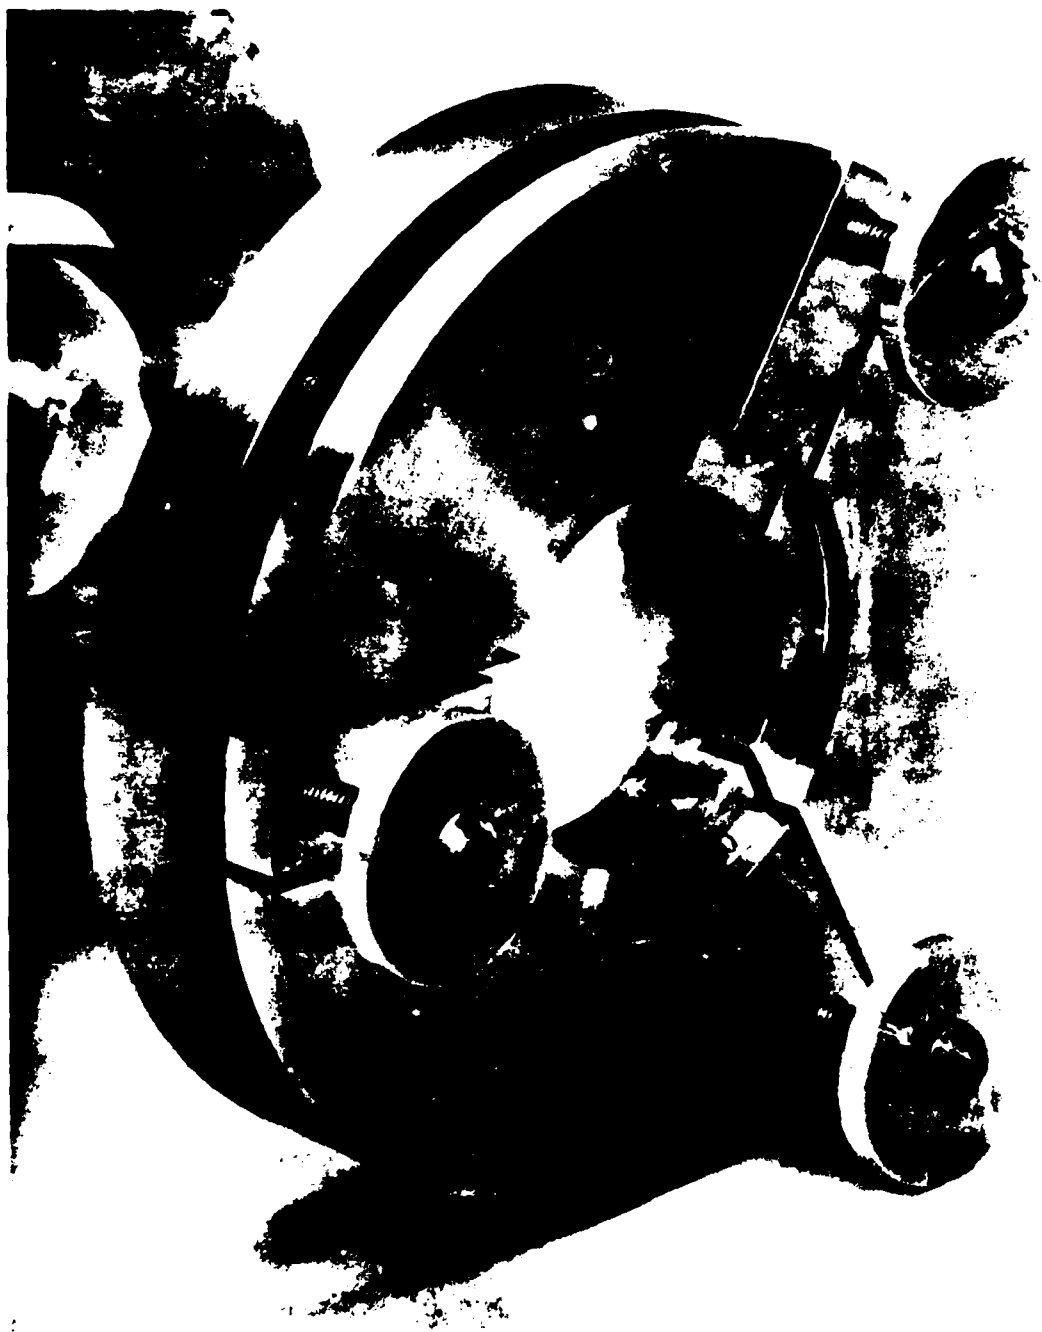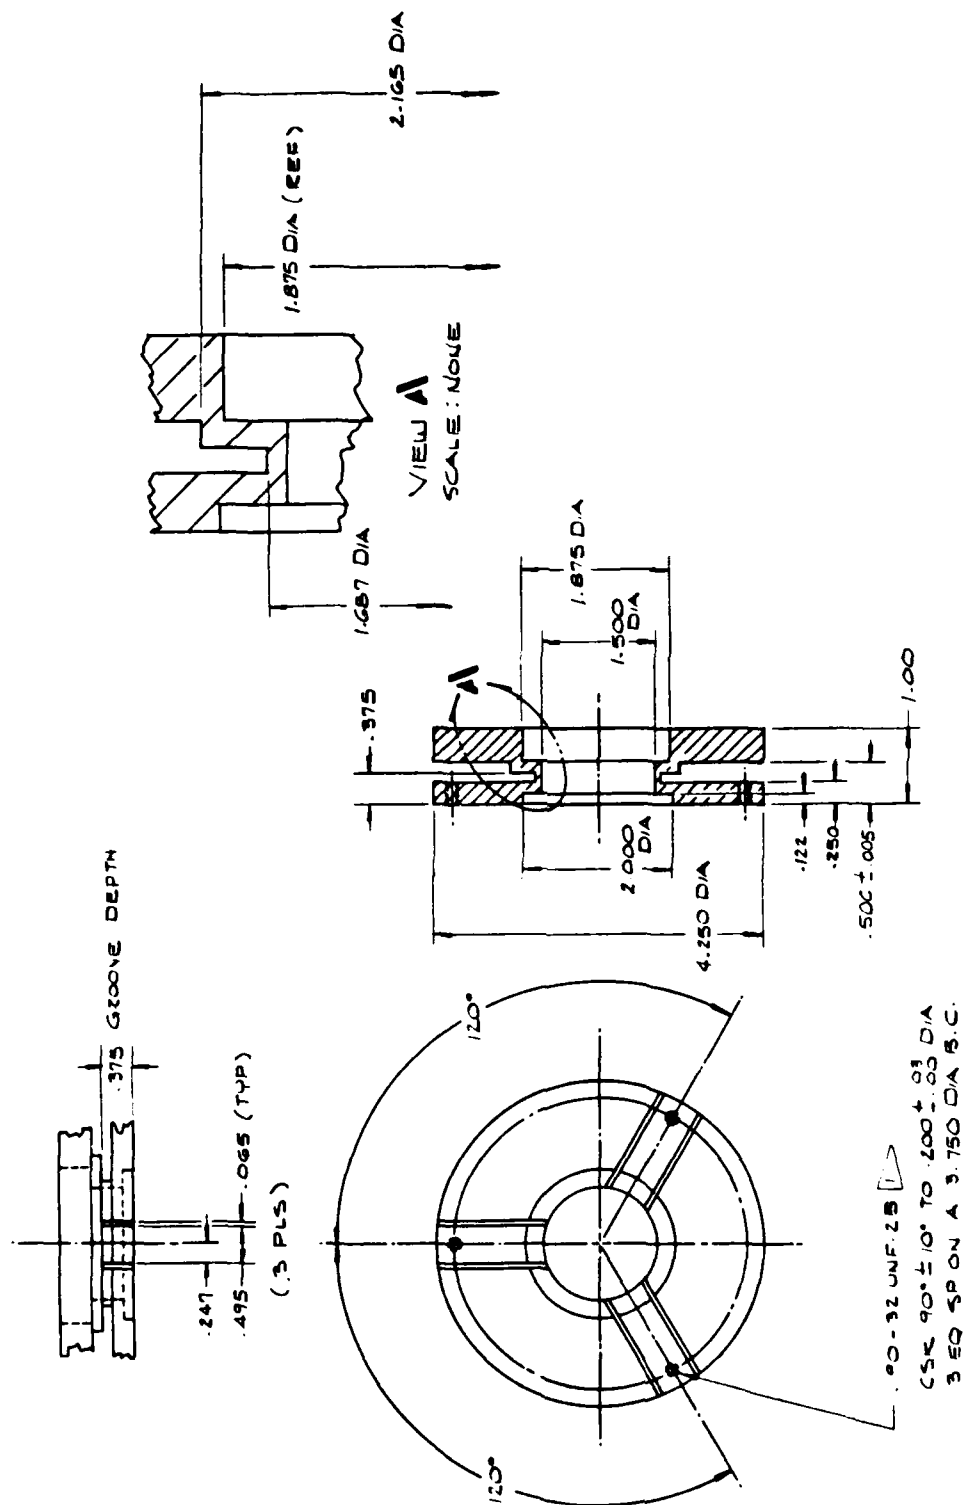
Figure 44. Close-Up Photograph of Fabry-Perot Mount

Figure 45. Blueprint of Fabry-Perot Mount

APPENDIX C

TABULAR DATA

Following are the experimental data from which Figures 30
through 37 were constructed. Each data point represents an average of
all measurements for the same cavity and pressure, and typically
includes more than 20 samplings performed at different times. The
standard deviation, then, indicates not only the scatter in the
subjective measurement process, but also provides a measure of the
experimental reproducibility.

Non-Saturation Results for $P_1(4)$ Line

L(cm)	p(torr)	%Shift	$\Delta(n-1) \times 10^5$	$\sigma \times 10^5$
47	.30	.119	2.38	.44
47	.50	.130	2.60	1.54
47	.75	.302	6.04	1.10
47	1.00	.336	6.72	1.06
47	1.10	.324	6.48	.80
47	1.45	.402	8.04	.70
47	1.50	.441	8.82	.94
47	1.55	.427	8.54	.84
47	2.00	.464	9.28	1.06
75	.30	.065	1.30	.40
75	.40	.085	1.70	.32
75	.50	.169	3.38	1.42
75	.58	.126	2.52	.88
75	.60	.188	3.76	.88
75	1.00	.228	4.56	.84
75	1.50	.329	6.58	.60
75	2.00	.325	6.50	1.14
75	2.50	.361	7.22	1.06
75	3.00	.380	7.60	2.24
87	1.00	.207	4.14	1.04
87	1.50	.343	6.86	1.36
87	2.00	.305	6.10	.70

114

Non-Saturation Results for $P_1(6)$ Line

L(cm)	p(torr)	%Shift	$\Delta(n-1) \times 10^5$	$\sigma \times 10^5$
47	2.40	.180	3.60	1.50
47	2.60	.153	3.06	.46
47	3.00	.176	3.52	.72
47	4.00	.243	4.86	.70
47	5.00	.270	5.40	.64
75	.50	.056	1.15	–
87	2.40	.100	2.00	.14
87	3.00	.134	2.68	.42

Saturation Results for $P_1(4)$ Line

L(cm)	p(torr)	%Shift	$\Delta(n-1) \times 10^5$	$\sigma \times 10^5$
47	.10	.045	.91	.52
47	.30	.112	2.24	.90
47	.50	.169	3.38	1.38
47	.75	.194	3.88	.94
47	1.00	.240	4.80	.94
47	1.25	.259	5.18	.81
47	1.50	.284	5.69	1.00
75	.10	.046	.92	.40
75	.14	.056	1.12	.24
75	.30	.101	2.02	.46
75	.50	.090	1.80	.38
75	.75	.115	2.30	.74
75	1.00	.141	2.82	.46
75	1.25	.161	3.22	.50
75	1.50	.175	3.50	.42
75	1.75	.189	3.78	.86
75	2.00	.210	4.20	1.04

REFERENCES

Anderson, P. W., "Pressure Broadening in the Microwave and Infra-Red
        Regions," Phys. Rev. 76:647-661 (1949).

Benedict, William S., Robert Herman, Gordon E. Moore, and Shirleigh
        Silverman, "The Strengths, Widths, and Shapes of Infrared Lines;
        I. General Considerations," Can. J. Phys. 34:830-849 (1956a).

Benedict, William S., Robert Herman, Gordon E. Moore, and Shirleigh
        Silverman, "The Strengths, Widths, and Shapes of Infrared Lines;
        The HCl Fundamental," Can. J. Phys. 34:850-875 (1956b).

Bennett, Jr., W. R., "Gaseous Optical Masers," Appl. Opt. Supp. 1:24-61
        (1962a).

Bennett, Jr., W. R., "Hole Burning Effects in a He-Ne Optical Maser,"
        Pnys. Rev. 126:580-593 (April 1962b).

Booth, D. J., and G. J. Troup, "Wavefront Distortion Caused by Saturated
        Anamalous Dispersion in Laser Amplifiers," Australian Defence
        Scientific Service Report 347 (October 1969).

Born, Max, and Emil Wolf, Principles of Optics, Oxford: Pergamon Press
        (1975).

Casperson, Lee, and Amnon Yariv, "Longitudinal Modes in a High-Gain
        Laser," App. Phys. Lett. 17:259-261 (September 1970).

Chodzko, R. A., C. P. Wang, and H. Mirels, "Effect of Anomalous
        Dispersion on CW Chemical Laser Performance," presented at
        Tri-Service Chemical Laser Conference, Silver Spring, Maryland
        (May 1978).

Close, Donald H., "Strong Field Saturation Effects in Laser Media,"
        Phys. Rev. 153:360-371 (January 1967).

Drummond, David L., "Refractive Index of HF From 2.5 μm to 2.9 μm,"
        Appl. Opt. 21:4331-4334 (December 1982).

Emanuel, George, "Computer-Generated A Coefficients for Hydrogen
        Fluoride," Aerospace Corporation, unpublished (1971).

Emanuel, G., W. D. Adams, and E. B. Turner, "RESALE-1: A Chemical Laser
        Computer Program," Aerospace Corporation Report TR-0172(2776)-1
        (July 1971).

Gross, R. W. F., R. A. Chodzko, E. B. Turner, and J. G. Coffer, "Measurements of the Anomalous Dispersion of HF in Absorption," Aerospace Corporation Report SAMSO-TR-79-44 (June 1979).

Gross, R. W. F., and J. G. Coffer, "Saturation Processes in Doppler-Broadened HF Vibrational Transitions," Aerospace Corporation Report SD-TR-83-64 (September 1983).

Herzberg, Gerhard, Molecular Spectra and Molecular Structure, I. Spectra of Diatomic Molecules, New York: Van Nostrand Reinhold Company (1950).

Hough, J. J. T., "Lorentz Broadening in the Modeling of the HF Chemical Laser," Appl. Opt. 16:2297-2307 (August 1977).

Jackson, John D., Classical Electrodynamics, 2nd Ed., New York: John Wiley and Sons, Inc. (1975).

Ladenburg, Rudolf, "Untersuchungen Über die Anomale Dispersion Angeregter Gase," Zeitschrift für Physik 48: 15-25 (1928).

Lengyel, Bela A., Lasers, 2nd Ed., New York: John Wiley and Sons, Inc. (1971).

Lorentz, H. A., "The Width of Spectral Lines," Proc. Amst. Acad., 18:134-150 (1915).

Marion, Jerry B., Classical Electromagnetic Radiation, New York: Academic Press (1965).

Meredith, R. E., "Strengths and Widths in the First Overtone Band of Hydrogen Fluoride," J. Quant. Spect. and Rad. Trans. 12: 485-503 (1972).

Meredith, R. E., T. S. Chang, F. G. Smith, and D. R. Woods, "Investigations in Support of High Energy Laser Technology," Science Applications, Inc., Report SAI-73-004-AA(I), Volume 1 (1973).

Meredith, Robert E., and Frederick G. Smith, "Computation of Electric Dipole Matrix Elements for Hydrogen Fluoride," J. Quant. Spect. and Rad. Trans. 13:89-114 (1973).

Mirels, Harold, "Inhomogeneous Broadening Effects in CW Chemical Lasers," AIAA Journ. 17:478-489 (May 1979).

Mitchell, Allan C. G., and Mark W. Zemansky, Resonance Radiation and Excited Atoms, London: Cambridge at the University Press (1971).

Siegman, A. E., An Introduction to Lasers and Masers, New York:
    McGraw-Hill Book Company (1971).

Tsao, C. J., and B. Curnette, "Line-Widths of Pressure-Broadened
    Spectral Lines," J. Quant. Spect. and Rad. Trans. 2:41-91
    (1963).

Wang, C. P., "Frequency Stability of a CW HF Chemical Laser," J. Appl.
    Phys. 47:221-223 (1976).

Wang, C. P., and R. L. Varwig, "Competition of Longitudinal and
    Transverse Modes in a CW HF Chemical Laser," Aerospace
    Corporation Report SD-TR-79-16 (December 1979a).

Wang, C. P., and R. L. Varwig, "Frequency Stabilization of HF Lasers by
    Means of Beat Signals and Anomalous Dispersion," J. Appl. Phys.
    50:3838-3840 (1978b).

Wang, C. P., and R. L. Varwig, "Direct Measurement of Anomalous
    Dispersion by Beam Steering and a Wavefront Sensor," Aerospace
    Corporation Report ATR-81(8408)-1 (May 1981).

END

FILMED

8-85

DTIC